

600-091 Composite Connector Accessory Coupling Nut Wrench

ALUMINUM TOOL FOR USE WITH GLENAIR COMPOSITE BACKSHELLS

600	- 091	- 16
Product Series	Basic Number	Dash Number

for Individual Wrench or:



K - Kit of dash numbers 08 thru 28
KC - "K" kit with case
KL - Kit of dash number 32 thru 44
KLC - "KL" kit with case
KIT - Kit of dash numbers 08 thru 44 with case

TABLE I: DASH NUMBER

Dash Number	A Ref	B Hex ² Ref	Connector for Shell Size		Composite Torque Inch Pounds In-Lbs Min/Max
			Codes A & F	Code H	
08	7.56 (192.0)	.750 (19.1)	08	09	20/25
10	7.56 (192.0)	.875 (22.2)	10	11	20/30
12	7.56 (192.0)	1.000 (25.4)	12	13	25/35
14	7.56 (192.0)	1.125 (28.6)	14	15	25/35
16	7.56 (192.0)	1.250 (31.8)	16	17	30/40
18	7.56 (192.0)	1.375 (34.9)	18	19	30/40
20	8.50 (215.9)	1.500 (38.1)	20	21	35/45
22	8.50 (215.9)	1.625 (41.3)	22	23	35/45
24	8.50 (215.9)	1.750 (44.5)	24	25	35/45
28	9.50 (241.3)	2.000 (50.8)	28		115/125
32	10.00 (254.0)	2.250 (57.2)	32		115/125
36	10.00 (254.0)	2.500 (63.5)	36		112/125
44	10.00 (254.0)	3.000 (76.2)	44		N/A

APPLICATION NOTES

1. Use in conjunction with Glenair 600-161 torque wrench and 600-162B or 600-162BV bench mounts (see page 14).
2. Adjust set screw per tool setting procedure GAP134 (available on Glenair.com). Once adjusted must fit Glenair hex composite coupling nuts
3. Customer is responsible for maintaining adjustment to compensate for wear.
4. Replace tool if excessive wear is observed
5. Gap is permissible during tool use for coupling nut assembly
6. If set screw becomes loose causing loss of adjustment reapply suitable thread locking compound
7. Wrenches are made of aluminum alloy with vinyl grips.
8. Using other manufacturer's hex wrench pliers or soft jaw coated pliers will result in premature fracturing or damage to the composite product

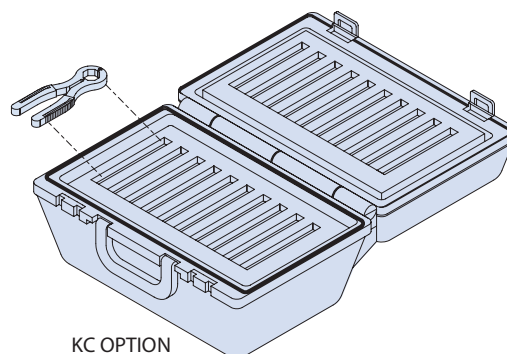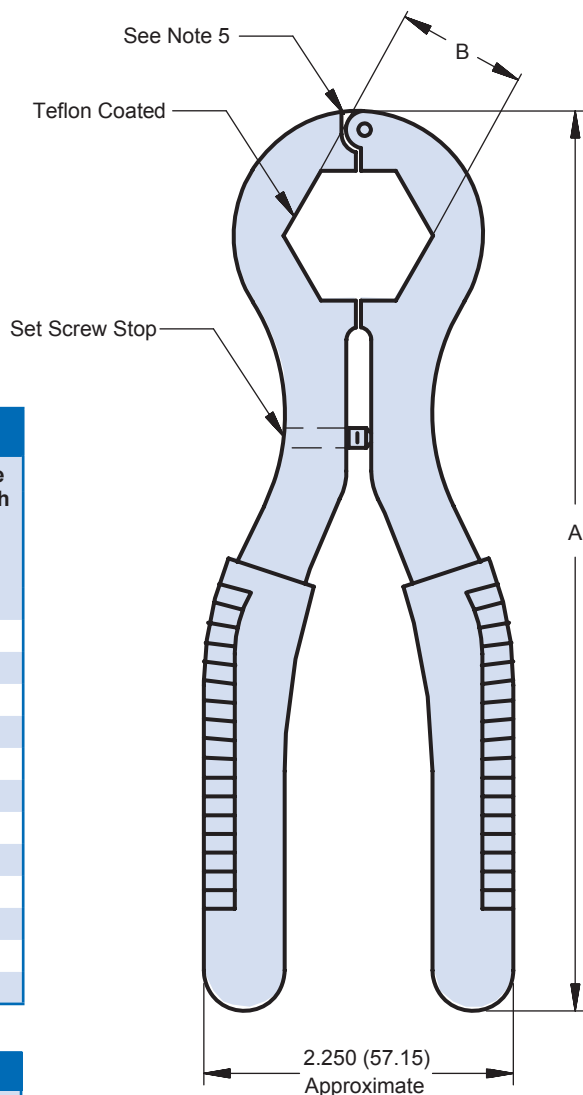

KC OPTION

Approximate Case Dimensions: 13.5 x 15.5 x 3.875