

RF, Microwave, and mmWave Interconnects

Series 795 High-Density Multi-Port RF Rectangular Connectors



852-157 G-LinkRF 852-256 SMA Adapters


- Size 8
- 50 Ohm
- 18 GHz BMB Style

- G-LinkRF
- Female SMA Adapter
- Integral Release Sleeve

50 Ohm

G-LinkRF

Pin Contact

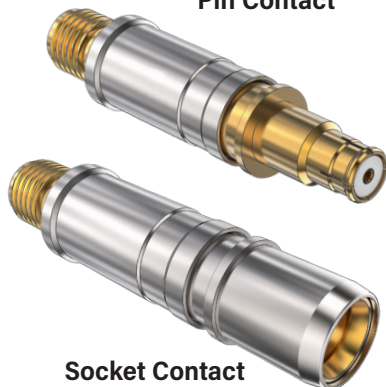

Socket Contact

G-LinkRF. SMA adapter. 18 GHz. 50 ohm. Size 8. Snap-in, rear release coax contacts fit Glenair Series 795 and Series 806 RF connectors with size 8 contact cavities. BMB-style contact features G-LinkRF female SMA adapter and integral release sleeve. Attach male SMA plug directly to contact, no soldering required. 50 ohm nominal impedance. DC - 18 GHz frequency range.


PART NUMBER

Pin Contact

Socket Contact

852-157

852-256

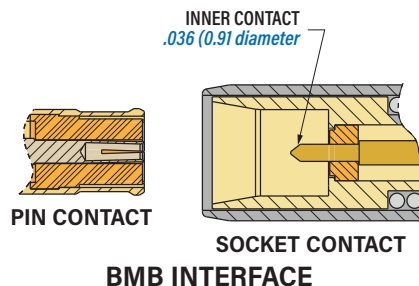


CONNECTOR COMPATIBILITY



SERIES 795
RF

- Series 795 connectors with size 8 contact cavities



SERIES 806
RF
MIL-AERO

- Series 806 RF connectors with size 8 RF contact cavities (806 RF size 8 contacts are not compatible with standard Series 806)


CONSTRUCTION

- Center contact: copper alloy, gold over nickel plating
- Dielectric: fluoropolymer
- SMA Body: copper alloy, gold over nickel plating
- Front Body: copper alloy, gold over nickel plating
- Socket contact outer sleeve: SST, passivated
- Socket contact spring: SST, passivated
- Integral release sleeve: SST, passivated


SPECIFICATIONS

- Operating temperature: -55 °C to +125 °C
- Dielectric withstanding voltage: 1000 Vac rms
- Frequency range: DC - 18 GHz
- VSWR: 1.45 maximum
- Impedance: 50 ohms
- Durability: 500 mating cycles

852-256 SOCKET CONTACT

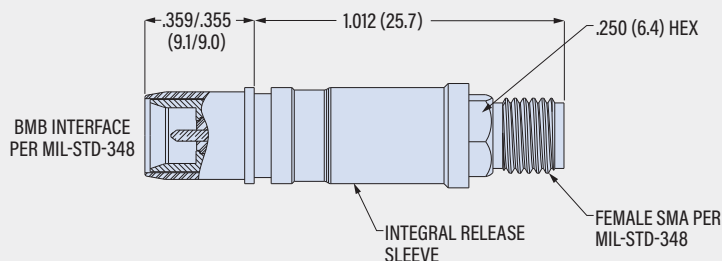

852-157 PIN CONTACT

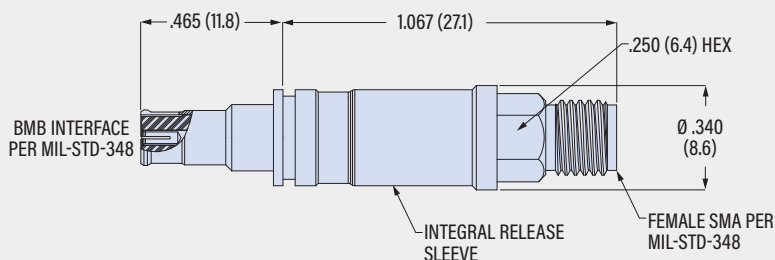

ADAPTERS

For tight clearance applications, pair with angled adapters. See RF Connector Adapters section for more information.



GRF05-0031
90 degrees



GRF05-0032
45 degrees

INSERTION/EXTRACTION TOOLS

Size	Type	Part Number
#16	Insert/Extract	809-131
#12	Insert/Extract	809-132
#8	Extract Only	859-049

DUMMY CONTACT SEALING PLUGS

Size	Part Number
#16	680-116-16
#12	680-116-12
#8	859-106