


121-191 Annular Polymer-Core Convulsed Tubing with External Braid and Jacket



Tubing with one EMI/RFI Braided shield plus jacket for use in environmental applications

How To Order

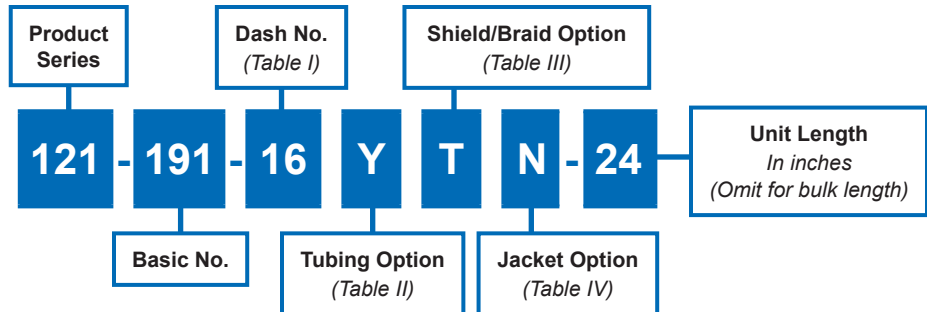


Dash No	A Inside Dia		B Outside Dia
	Min	Max	Max
06	.17 (4.3)	.19 (4.8)	.51 (12.9)
09	.24 (6.1)	.28 (7.1)	.61 (15.5)
12	.33 (8.4)	.37 (9.4)	.71 (18.0)
14	.40 (10.1)	.44 (11.2)	.78 (19.8)
16	.45 (11.4)	.50 (12.7)	.85 (21.6)
20	.57 (14.5)	.62 (15.7)	.96 (24.4)
24	.69 (17.5)	.75 (19.1)	1.13 (28.7)
28	.81 (20.6)	.87 (22.1)	1.27 (32.2)
32	.93 (23.6)	1.00 (25.4)	1.39 (35.3)
40	1.18 (30.0)	1.25 (31.8)	1.63 (41.4)
48	1.43 (36.3)	1.50 (38.1)	1.90 (48.3)
52	1.56 (39.6)	1.63 (41.4)	2.04 (51.8)

Y	Kynar/Thermally stabilized
V	PVDF/Not thermally stabilized
S	G-FLEX Siltem/Medium duty - natural color only

T	Tin/Copper
C	Stainless Steel
N	Nickel Copper
L	ArmorLite™
D	Dacron
M	Nomex
E	AmberStrand® 100%
F	AmberStrand® 75%/25%
-	No braid

N	Neoprene
H	Hypalon
E	EPDM
V	Viton
B	Duralectric, black
G	Bluejacket, Gray
TN	Duralectric, Desert Tan

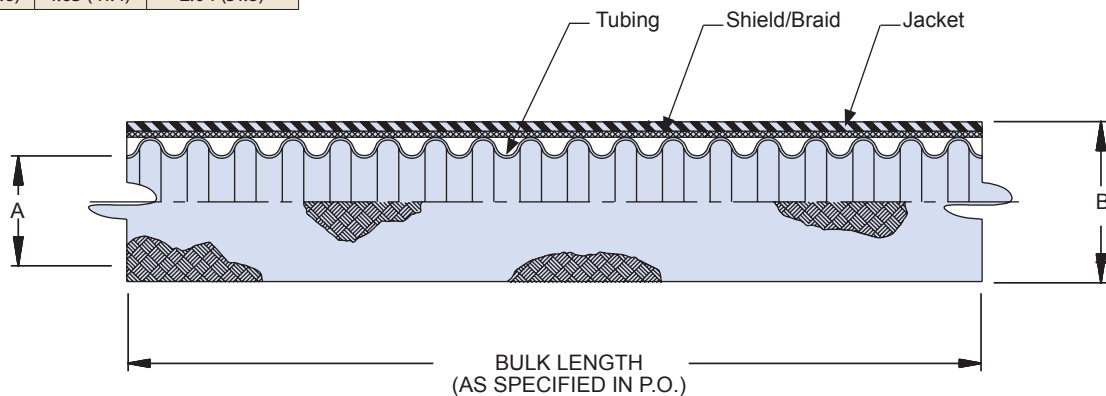

Dash No.	Max Length Per Pkg.
09& 12	200 ft (60m)
16 - 52	100 ft (30m)

Packaging

121-191 braided and jacketed conduit is typically supplied in 50 foot lengths. Longer lengths are available—consult factory for additional information. Unless otherwise specified, Glenair packages optimal lengths of product based on weight, size, and commercial carrier specifications. If necessary, consult factory for additional information on package weight restrictions.