


El Ochito® PCB Transition Adapters 858-025

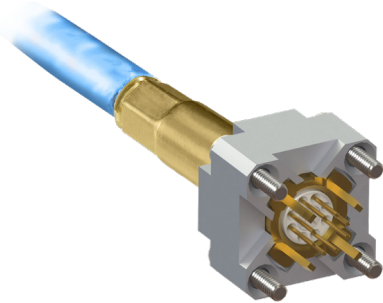



Launch controlled impedance signals with El Ochito® transition adapters. Accepts 90 ohm USB 3.0 cable or 100 ohm Category 6A Ethernet cable. Supplied as unassembled kit with (8) inner contacts, inner and outer insulators, bushing, outer body, crimp ferrule and mounting block. Terminate inner contacts and cable shield with crimp tools sold separately. Attach mounting block to circuit board with #0-80 screws and 059-0007-1 threaded inserts, sold separately.

858-025 El Ochito® PCB Transition Adapters

Dash No.	Color	Cables Accomodated	Protocols/Impedance	Ref Cable O.D.	"A" Hex	Assembly Instructions
-01	White	963-033-26	Ethernet (100 OHM Nominal)	.220 (5.59)	.231	A185101-01
-02	Blue	963-118	USB 3.0 (90 ±15 OHM)	.217 (5.51)	.231	A185101-02
-03	Red	963-033-26	Other (100 ±15 OHM)	.220 (5.59)	.231	A185101-03

858-025 Components

Supplied as Unassembled Kit

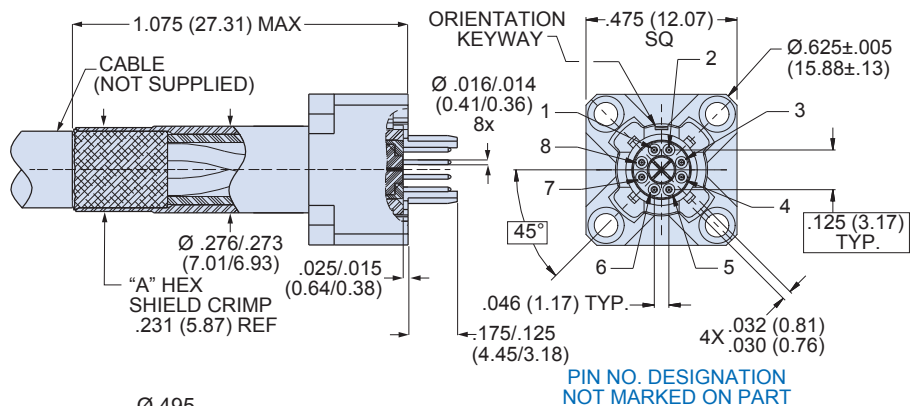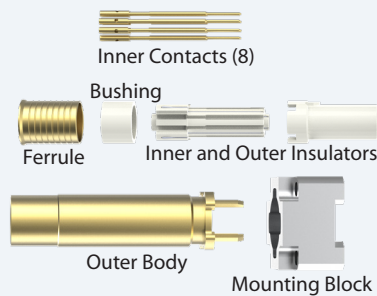

PIN NO. DESIGNATION NOT MARKED ON PART



Technical Data

Specifications

- Operating temperature:**
El Ochito® White: -65 to +175°C
El Ochito® Blue and Red: -65 to +125°C
- Impedance:**
El Ochito® White and Red: 100 ohms
El Ochito® Blue: 90 ohms
- Dielectric withstanding voltage:**
500 Vrms
- Current Rating:** 1.5 A
- Insulation resistance:** 5000 megohms min. @ 200 Vdc

Construction

- Inner contacts, outer body, ferrule:** copper alloy, 50 microinches gold over nickel plating
- Insulators, bushing:** thermoplastic
- Mounting block:** aluminum, electroless nickel plating

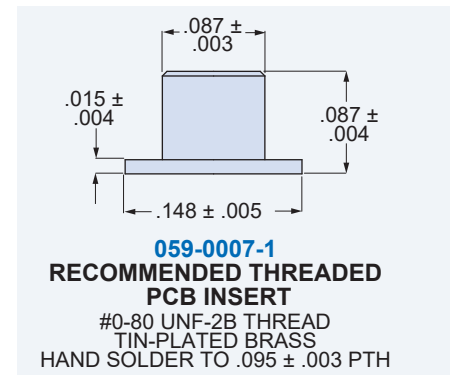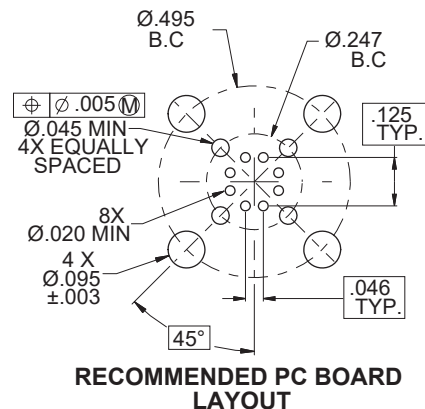

Inner Contact Crimp Tools



809-015
(M22520/2-01)



859-101
(K1906)



809-129
(M22520/5-01)



859-007
(M22520/5-45)

Shield-Ferrule Crimp Tools