


181-066 Fiber optic socket terminus, size 20



PART NUMBER	FIBER SIZE CORE/CLADDING	Ø A (MICRONS)	TYP. FIBER TYPE
181-066-1255	9/125	125.5	Singlemode
181-066-126	50/125 & 62.5/125	126.0	Multimode

TERMINUS ACCESSORIES	
Part Number	Terminus Accessory
181-066-S	Ceramic Alignment Sleeve
181-066-C	Protective Cover

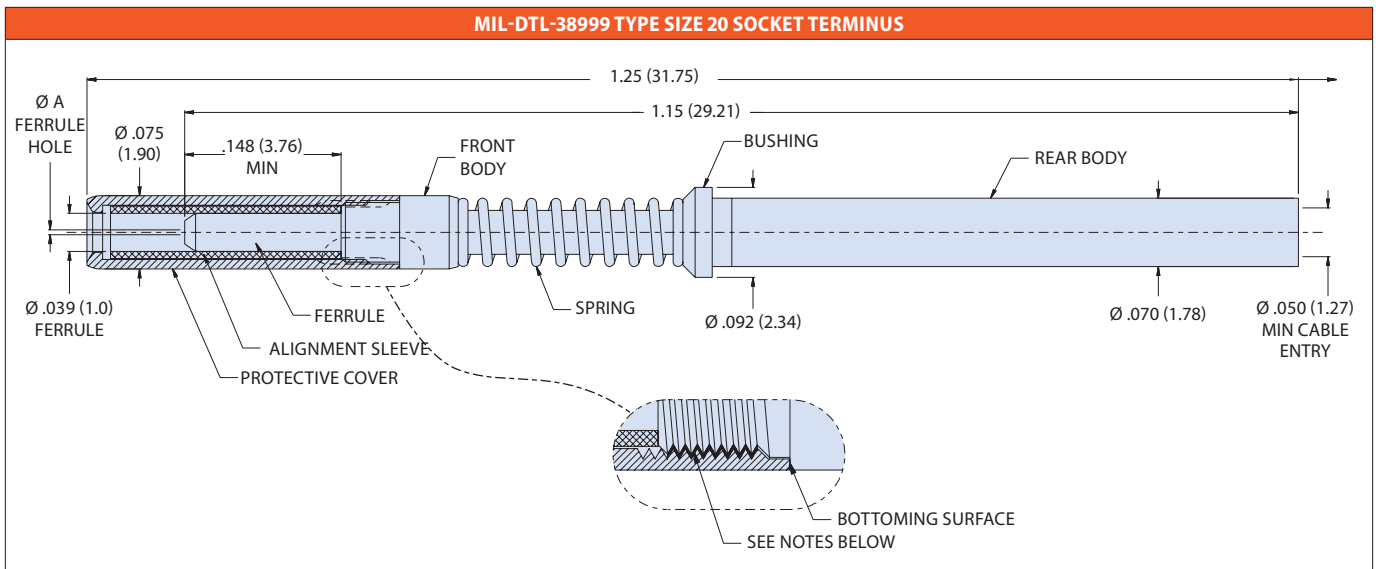

- MATERIAL AND FINISH**
- Ferrule: Zirconia Ceramic
 - Alignment Sleeve: Zirconia Ceramic
 - Body (Front and Rear): Copper-Nickel-Zinc Alloy
 - Protective Cover: Copper-Nickel-Zinc Alloy
 - Bushing: Copper-Nickel-Zinc Alloy
 - Spring: Stainless Steel/Passivate

- NOTES**
- See assembly procedure GAP-056 for complete termination instructions.
 - Protective cover must be retained using Threadlocker "Loctite 222" prior to insertion and fully seated against terminus body as shown.
 - Recommended insertion/extraction tool: M81969/14-10 or equivalent.
 - Consult factory for appropriate termination and assembly tools/procedures