


Series 806 Mil-Aero Connectors



806-040 Box Mount PCB Receptacle Connectors, High-Speed / RF



806-040 Box-mount PCB receptacles with potted-in-place printed circuit board terminals, integral standoffs, and threaded holes for secure attachment to rigid or flex circuit boards. Series supports hybrid signal and high-speed / RF shielded contacts including Glenair Signature El Ochito, Quadrax, 50 Ohm Coax, and differential Twinax for 10GbE, HDMI, USB 3.0, and RF applications. Micro miniature Series 806 connectors save size and weight compared to legacy aerospace-grade circular connectors. These hybrid insert arrangement connectors are suitable for high-speed digital and standard signal applications in unpressurized aircraft zones subject to vibration, moisture, altitude, and temperature extremes.

Features

- Triple-start stub ACME mating thread
- Size 8 El Ochito arrangements or hybrid size 8 and 22 arrangements
- Aerospace-grade materials, construction
- Integral PC board standoffs
- Threaded holes for secure attachment to rigid or flex circuits
- Alignment post

Specifications

- Operating temperature: -65°C to +175°C
- Dielectric withstanding voltage:
#22HD contacts: 1300 VAC
#8 contacts: contact factory
- Mating durability: 500 cycles
- Mechanical shock: EIA-364-27, 300g.
- Vibration (sine): MIL-DTL-38999M, 60g.
- Vibration (random) EIA-364-28 Condition VI, Letter J, 43.92 Grms, +200°C
- High Impact shock: MIL-S-901 Grade A
- Humidity: EIA-364-31 Method 4
- Salt spray (dynamic): EIA-364-26, 500 hours (96 hours for nickel-plated versions)
- Fluid immersion: EIA-364-10
- Altitude immersion: EIA-364-03 75,000 feet altitude
- Indirect Lightning Strike: EIA-364-75 Type B Level 2 10kA Peak

Connector Construction

- Shell, jam-nut: aluminum or stainless steel
- Contacts: copper alloy, gold plating
- Potting compound: epoxy
- Interfacial seal and peripheral seal: fluorosilicone
- Dielectric inserts: high grade rigid dielectric
- Clinch nuts: stainless steel, passivated

How To Order	
SAMPLE PART NUMBER	806-040 -ME 14 E - 20A S T A
Product	806-040 = Box Mount, El Ochito PCB Receptacle
Shell Material and Finish	ME = Aluminum, Electroless Nickel MT = Aluminum, Ni/PTFE ZR = Aluminum, Black Zinc-Nickel NF = Aluminum, Olive Drab Cadmium Z1 = Stainless Steel, Passivated
Shell Size	See Table I
Contact Type	See Table II
Ground Option	G = Common Ground Dash (-) = None Available for 10-1, 16-2, 18-3, 20-4, 22-5, and 24-8 inserts
Contact Layout	See Table I
Contact Gender	P = Pin S = Socket; see Table VI for El Ochito mating contacts
Mounting Hole Style	T = Thru holes C = Clinch nut flange, #4-40, M45938/6-4C (rear panel mounting); consult factory for SST material
Polarization	A B C D E F

Table I: Shell Size - Insert Arrangement		
Contact Layout	Number of Contacts	
	22HD	8
10-1		1
16-2		2
18-3		3
20-4		4
22-5		5
24-8		8
14-20A	19	1
16-22	20	2
18-21	18	3
20-28	24	4
22-44	40	4
24-97	93	4

Table II: Contact Type	
Contact Symbol	Description
C	Coax, 50 ohm
D	Differential Twinax 100 ohm
E**	El Ochito (see Table IV for symbol)
Q	Quadrax, 100 ohm

**See Table III for complete Protocol Code


ENVIRONMENTAL, MICRO MINIATURE CIRCULAR

Series 806

Mil-Aero Connectors



806-040 Box Mount PCB Receptacle Connectors, High-Speed / RF

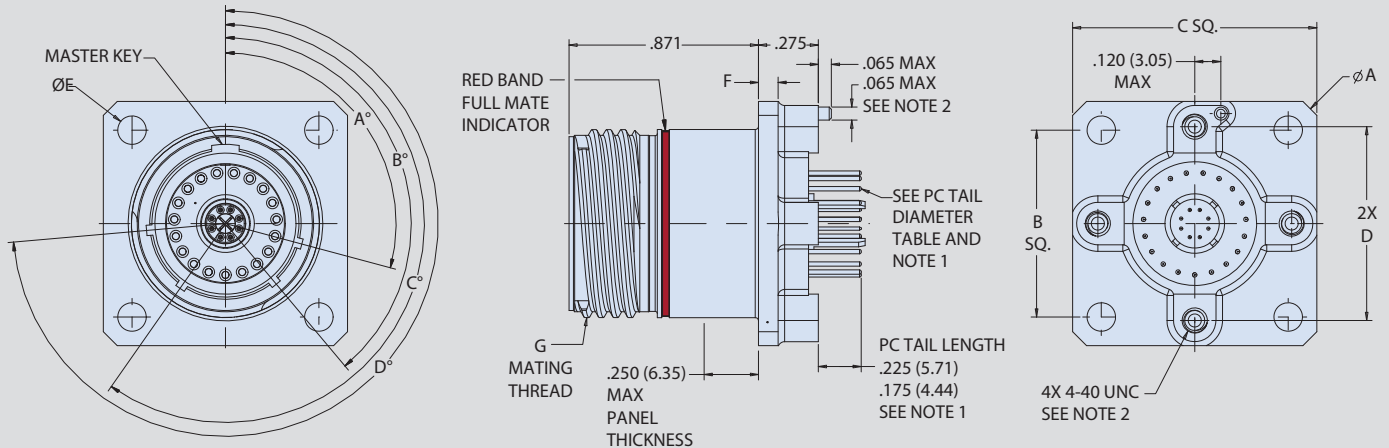

Dimensions

Shell Size	A Max	B	C Max	D	E Mounting Hole	F Flange Thickness	G Mating Thread
10	1.174 (29.82)	0.625 (15.88)	0.913 (23.19)	0.679 (17.25)	0.128 (3.25)	0.100 (2.54)	.625-.067P-.2L-TS-2B
14	1.510 (38.35)	0.859 (21.82)	1.133 (28.78)	0.891 (22.63)			.875-.067P-.2L-TS-2B
16	1.620 (41.15)	0.938 (23.83)	1.242 (31.55)	1.049 (26.64)			1.000-.067P-.2L-TS-2B
18	1.784 (45.31)	1.016 (25.81)	1.343 (34.11)	1.148 (29.16)			1.125-.067P-.2L-TS-2B
20	1.910 (48.51)	1.109 (28.17)	1.444 (36.68)	1.252 (31.80)			1.250-.067P-.2L-TS-2B
22	2.083 (52.91)	1.203 (30.56)	1.570 (39.88)	1.369 (34.77)	0.154 (3.91)	0.125 (3.18)	1.375-.067P-.2L-TS-2B
24	2.200 (55.88)	1.312 (33.32)	1.704 (43.28)	1.509 (38.33)			1.500-.067P-.2L-TS-2B

PC Tail Diameter


CONTACT SIZE	PC TAIL
22	Ø.020 (0.51)
COAX	Ø.025 (0.64)
DIFF TWINAX	Ø.025 (0.64)
EL OCHITO	Ø.016 (0.41)
QUADRAX	Ø.025 (0.64)
SIZE 8 GROUND	.030 (0.76) SQ.

Recommended Mounting Hole

Shell Size	ØJ	H	
		With Clinch Nut	Without Clinch Nut
10	0.645 (16.38)	0.128 (3.25)	0.128 (3.25)
14	0.890 (22.61)		
16	1.015 (25.78)		
18	1.125 (28.58)		
20	1.275 (32.39)		
22	1.400 (35.56)	0.154 (3.91)	
24	1.525 (38.73)		

NOTES

- See Glenair application note AN0002 for optimal EI Ochito board layout and design
- Integral PCB Stand off 4x 4-40 UNC .156 min thread and locating post
- See Table V for different combinations of EI Ochito types
- Connector meets all performance requirements of Glenair product specification 806-014 and applies to all finishes
- Receptacle connector mates with all quick coupling, Glenair 806 style, plug connectors with same polarization and opposite contact gender



Series 806 Mil-Aero Connectors




806-040 Box Mount PCB Receptacle Connectors, High-Speed / RF

El Ochito Mating Contact		
PART NUMBER	PROTOCOLS	
WHITE - PIN	858-045 Type I	10GBASE-T ETHERNET, CAT 6A 40GBASE-T ETHERNET, CAT 8
	858-051 Type II	10GBASE-T ETHERNET, CAT 6A 40GBASE-T ETHERNET, CAT 8
WHITE - SKT	858-046 Type I	10GBASE-T ETHERNET, CAT 6A 40GBASE-T ETHERNET, CAT 8
	858-052 Type II	10GBASE-T ETHERNET, CAT 6A 40GBASE-T ETHERNET, CAT 8
BLUE - PIN	858-047	USB 3.0, OTHER 90 OHM SIGNALS
BLUE - SKT	858-048	USB 3.0, OTHER 90 OHM SIGNALS
RED - PIN	858-049	HDMI, DISPLAYPORT, SATA, OTHER 100 OHM SIGNALS
RED - SKT	858-050	HDMI, DISPLAYPORT, SATA, OTHER 100 OHM SIGNALS

El Ochito Protocols		
WHITE	BLUE	RED
10GBASE-T	USB 3.0	HDMI, SATA, DisplayPort

The Ochito octaxial contact has a color-coded insulator signifying the data protocol. White is used for 10 Gb Ethernet, blue is used for USB 3.0, and red is used for multi gigabit 100 ohm protocols including HDMI, DisplayPort and SATA. The connector part number includes a protocol code from Table III. This code determines specific contact position for every combination of protocol.

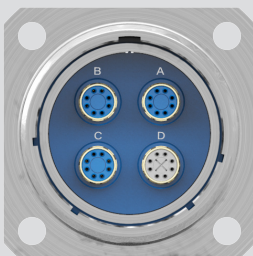

Example
Code E7



Example
Code E5

Table III: Protocol Code for El Ochito Contact Positions B = Blue, R = Red, W = White								
SYMBOL	Contact							
	A	B	C	D	E	F	G	H
E	W	W	W	W	W	W	W	W
E2	B	W	W	W	W	W	W	W
E3	R	W	W	W	W	W	W	W
E4	B	B	W	W	W	W	W	W
E5	R	B	W	W	W	W	W	W
E6	R	R	W	W	W	W	W	W
E7	B	B	B	W	W	W	W	W
E8	R	B	B	W	W	W	W	W
E9	R	R	B	W	W	W	W	W
E10	R	R	R	W	W	W	W	W
E11	B	B	B	B	W	W	W	W
E12	R	B	B	B	W	W	W	W
E13	R	R	B	B	W	W	W	W
E14	R	R	R	B	W	W	W	W
E15	R	R	R	R	W	W	W	W
E16	B	B	B	B	B	W	W	W
E17	R	B	B	B	B	W	W	W
E18	R	R	B	B	B	W	W	W
E19	R	R	R	B	B	W	W	W
E20	R	R	R	R	B	W	W	W
E21	R	R	R	R	R	W	W	W
E22	B	B	B	B	B	B	W	W
E23	R	B	B	B	B	B	W	W
E24	R	R	B	B	B	B	W	W
E25	R	R	R	B	B	B	W	W
E26	R	R	R	R	B	B	W	W
E27	R	R	R	R	R	B	W	W
E28	R	R	R	R	R	R	W	W
E29	B	B	B	B	B	B	B	W
E30	R	B	B	B	B	B	B	W
E31	R	R	B	B	B	B	B	W
E32	R	R	R	B	B	B	B	W
E33	R	R	R	R	B	B	B	W
E34	R	R	R	R	R	B	B	W
E35	R	R	R	R	R	R	B	W
E36	R	R	R	R	R	R	R	W
E37	B	B	B	B	B	B	B	B
E38	R	B	B	B	B	B	B	B
E39	R	R	B	B	B	B	B	B
E40	R	R	R	B	B	B	B	B
E41	R	R	R	R	B	B	B	B
E42	R	R	R	R	R	B	B	B
E43	R	R	R	R	R	R	B	B
E44	R	R	R	R	R	R	R	B
E45	R	R	R	R	R	R	R	R

Series 806 Mil-Aero Connectors



806-040 Box Mount PCB Receptacle Connectors, High-Speed / RF

Size 8 PCB Footprints for Coax, Quadrx, Twinax and El Ochito

See Appendix A for complete PCB footprint details

