

GLENAIR SERIES 260 MIL-DTL-26482 Hermetic Series II Type

230-017 Bayonet Coupling Wide Flange Mount Receptacle MS3442 Type



HOW TO ORDER						
Sample Part Number	230-017	ME	16	-26	P	Y
Series / Basic Part No.	230-017 = Wide Flange Mount Receptacle		Shell Size Insert Arrangement			
Material/Finish	Z1 = Stainless Steel/ Passivated FT = C1215 Stainless Steel/Tin Plated (See Note 2)					
Shell Size - Layout	Shell Sizes: 8, 10, 12, 14, 16, 18, 20, 22, 24 Layout per MIL-STD-1669; see Shell Size - Insert Layout table					
Contact Type	P = Pin, Solder Cup S = Socket, Solder Cup		X = Pin, Eyelet Z = Socket, Eyelet			
Alt. Polarization	W, X, Y, Z, Omit for normal					

HERMETIC LEAK RATE MOD CODES	
Designator	Required Leak Rate
-585A	1 x 10 ⁻¹⁰ cc Helium per second
-585B	1 x 10 ⁻⁹ cc Helium per second
-585C	1 x 10 ⁻⁸ cc Helium per second

- NOTES**
- To be identified with manufacturer's name, part number and date code, space permitting.
 - Material/Finish:
 - Shell: per part number development Titanium and Inconel® available. Consult factory.
 - Contacts - 52 Nickel alloy/gold plate.
 - Sockets - Copper alloy, gold plated.
 - Bayonets - Stainless steel/passivate.
 - Seals - Silicone elastomer
 - Insulation - Glass
 - Socket: Rigid dielectric
 - Consult factory and/or MIL-STD-1669 for arrangement and insert position options.
 - Glenair 230-017 will mate with any QPL MIL-DTL-26482 Series II bayonet coupling plug of same size and insert polarization.
 - Performance:
 - Hermeticity - <1 x 10⁻⁷ cc/sec @ 1 atm differential.
 - Dielectric withstanding voltage - Consult factory or MIL-STD-1669.
 - Insulation resistance - 5000 megohms min @500VDC.

SHELL SIZE - INSERT LAYOUT															
Shell Size - Layout	Size / Quantity			Shell Size - Layout	Size / Quantity			Shell Size - Layout	Size / Quantity			Shell Size - Layout	Size / Quantity		
	20	16	12		20	16	12		20	16	12		20	16	12
8-2	2			14-9	5		4	18-11		11		22-19			19
8-3	3			14-12	8	4		18-30	29	1		22-21		21	
8-4	4			14-15	14	1		18-32	32			22-32	32		
8-33	3			14-18	18			18-85	5		8	22-34	34		
8-98	3			14-19	19			20-16		16		22-41	27	14	
10-6	6			14-22	1		4	20-24	24			22-55	55		
10-98	6			16-8		8		20-27	27			22-95	26		6
12-3		3		16-14	8		6	20-39	37	2		24-19			19
12-8	8			16-23	22	1		20-41	41			24-27	11		16
12-10	10			16-26	26			20-90	3		12	24-31		31	
14-4			4	16-99	21	2		22-12			12	24-61	61		
14-5		5		18-8			8	22-19							19

GLENAIR SERIES 260 MIL-DTL-26482 Hermetic Series II Type



230-017 Bayonet Coupling Wide Flange Mount Receptacle MS3442 Type

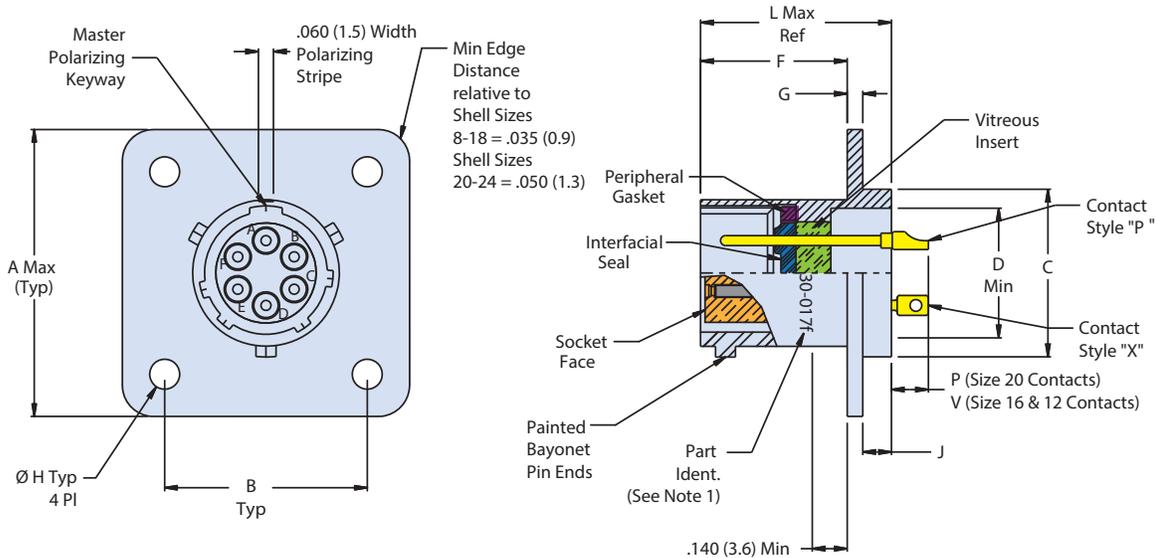


TABLE I: CONNECTOR AND CUT-OUT DIMENSIONS (CONTINUED BELOW)

Shell Size	A	B	C Dia Mounting Locator	D Dia Min	F	G	H	J	L	P	V	Panel Cut-Out Dia
8	1.065 (27.1)	.734 (18.6)	.563/.557 (14.3/14.1)	.403 (10.2)	.598/.578 (15.2/14.7)	.078/.046 (2.0/1.2)	.150 (3.8)	.125/.105 (3.2/2.7)	.801 (20.3)	.178/.118 (4.5/3.0)	.248/.188 (6.3/4.8)	.570 (14.5)
10	1.141 (29.0)	.812 (20.6)	.673/.667 (17.1/16.9)	.515 (13.1)	.598/.578 (15.2/14.7)	.078/.046 (2.0/1.2)	.150 (3.8)	.125/.105 (3.2/2.7)	.801 (20.3)	.178/.118 (4.5/3.0)	.248/.188 (6.3/4.8)	.680 (17.3)
12	1.266 (32.2)	.938 (23.8)	.782/.776 (19.9/19.7)	.630 (16.0)	.598/.578 (15.2/14.7)	.078/.046 (2.0/1.2)	.150 (3.8)	.125/.105 (3.2/2.7)	.801 (20.3)	.178/.118 (4.5/3.0)	.248/.188 (6.3/4.8)	.789 (20.0)
14	1.360 (34.5)	1.031 (26.2)	.907/.901 (23.0/22.9)	.755 (19.2)	.598/.578 (15.2/14.7)	.078/.046 (2.0/1.2)	.150 (3.8)	.125/.105 (3.2/2.7)	.801 (20.3)	.178/.118 (4.5/3.0)	.248/.188 (6.3/4.8)	.914 (23.2)
16	1.453 (36.9)	1.125 (28.6)	1.032/1.026 (26.2/26.1)	.880 (22.4)	.598/.578 (15.2/14.7)	.078/.046 (2.0/1.2)	.150 (3.8)	.125/.105 (3.2/2.7)	.801 (20.3)	.178/.118 (4.5/3.0)	.248/.188 (6.3/4.8)	1.039 (26.4)
18	1.532 (38.9)	1.203 (30.6)	1.157/1.151 (29.4/29.2)	.980 (24.9)	.598/.578 (15.2/14.7)	.078/.046 (2.0/1.2)	.150 (3.8)	.125/.105 (3.2/2.7)	.801 (20.3)	.178/.118 (4.5/3.0)	.248/.188 (6.3/4.8)	1.164 (29.6)
20	1.688 (42.9)	1.297 (32.9)	1.251/1.245 (31.8/31.6)	1.105 (28.1)	.660/.640 (16.8/16.3)	.110/.078 (2.8/2.0)	.150 (3.8)	.125/.105 (3.2/2.7)	.863 (21.9)	.178/.118 (4.5/3.0)	.248/.188 (6.3/4.8)	1.258 (32.0)
22	1.766 (44.9)	1.375 (34.9)	1.376/1.371 (35.0/34.8)	1.230 (31.2)	.660/.640 (16.8/16.3)	.110/.078 (2.8/2.0)	.150 (3.8)	.125/.105 (3.2/2.7)	.895 (22.7)	.146/.086 (3.7/2.2)	.216/.156 (5.5/4.0)	1.383 (35.1)
24	1.891 (48.0)	1.500 (38.1)	1.501/1.495 (38.1/38.0)	1.385 (35.2)	.660/.640 (16.8/16.3)	.110/.078 (2.8/2.0)	.150 (3.8)	.125/.105 (3.2/2.7)	.895 (22.7)	.146/.086 (3.7/2.2)	.216/.156 (5.5/4.0)	1.508 (38.3)