



687-764

Ferrule and Heat Shrink Terminator Device Kit for StarShield™ Backshells

Ferrule and heat shrink terminator device kit


Product
SeriesSize
(See Table I)

687


- 764 -

02


M

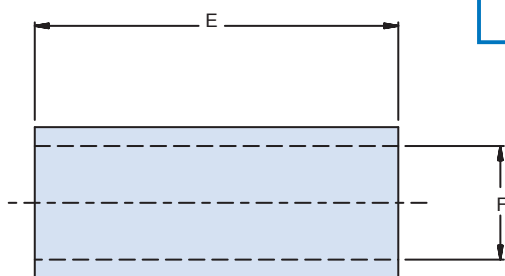Basic
NumberFinish Code
(See Table II)

INSULATION SLEEVE

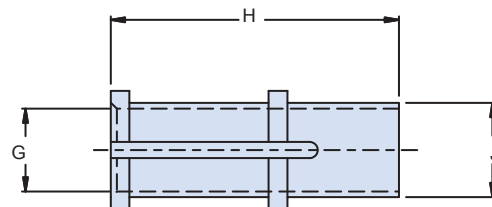

FERRULE

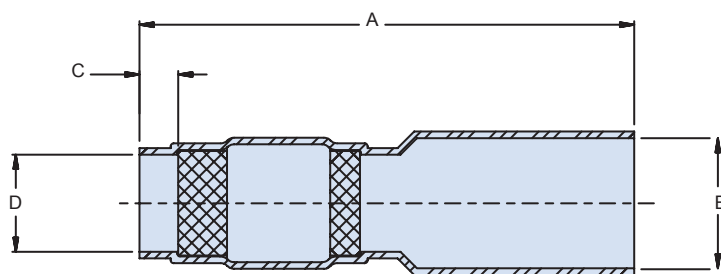

HEAT SHRINK TERMINATOR (HST) DEVICE

Material/Finish

Ferrule	Copper alloy/see Table II
Insulation sleeve	Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride
Radiation cross-linked modified polyvinylidene fluoride HST Device:	
Heat shrinkable insulation sleeve.	Radiation cross-linked modified polyvinylidene fluoride
Aarmorlite or copper braid	Pre-tinned with Sn96Ag3.5Cu.5 solder alloy with activated rosin flux.
Solder preform	Sn96Ag3.5Cu.5 solder alloy with activated rosin flux.

Table I

Order No.	A Dia Max	B Dia Min	C Max	D Dia Min	E Min	F Dia Min	G Dia Min	H Max	J Ref
02	1.045 (26.5)	.275 (7.00)	.080 (2.0)	.205 (5.2)	.768 (19.5)	.240 (6.1)	.170 (4.3)	.620 (15.7)	.200 (5.1)
04	1.181 (30.0)	.354 (9.00)	.098 (2.5)	.205 (5.2)	.768 (19.5)	.240 (6.1)	.170 (4.3)	.620 (15.7)	.200 (5.1)
05	1.850 (47.0)	.475 (12.07)	.118 (3.0)	.362 (9.5)	1.000 (25.4)	.370 (9.4)	.300 (7.6)	1.004 (25.5)	.354 (9.0)

Table II

Code	Finish Description
M	Electroless nickel
NF	CAD/O. D. Over electroless nickel (1000 Hour salt spray)
ZRC	Aluminum/zinc-nickel

Notes:

1. Identified by bag and tag in suitable quantities.
2. The Ferrule and the HST Device are used on Glenair StarShield™ adapters.
3. Temperature range: -65°C to +175°C

Dimensions in inches (millimeters) and are subject to change without notice.

© 2012 Glenair, Inc.

StarShield™ Zero Length Shield Termination Catalog

CAGE Code 06324

Printed in U.S.A.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912

www.glenair.com

C-4

E-Mail: sales@glenair.com