


SIZE 20 SOCKET TERMINUS FOR MIL-DTL-38999 SERIES III



Part Number	Fiber Size Core/Cladding	Ø A (Microns)	Typ. Fiber Type
181-066-1255	9/125	125.5	Singlemode
181-066-126	50/125 & 62.5/125	126.0	Multimode

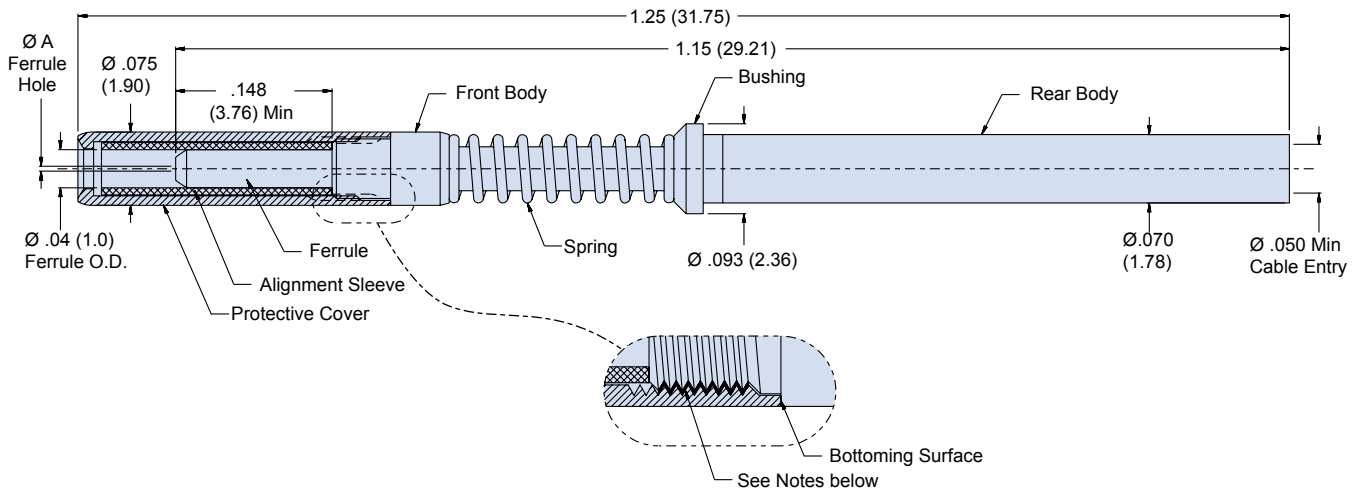

NOTES

1. Protective cover must be retained using "Threadlocker Loctite 222" prior to insertion and fully seated against terminus body as shown.
2. Consult factory for appropriate termination and assembly tools/procedures
3. For dust cap use P/N 187-266
4. Material/finish
 - Ferrule: zirconia ceramic
 - Alignment sleeve: zirconia ceramic
 - Body (front and rear): copper-nickel-zinc alloy
 - Protective cover: copper-nickel-zinc alloy
 - Bushing: copper-nickel-zinc alloy
 - Spring: stainless steel/passivate

Terminus Accessories

Part Number	Terminus Accessory
181-066-S	Ceramic Alignment Sleeve
181-066-C	Protective Cover