

"ZERO-CROSSTALK" VersaLink™ Bridge Board Connectors



853-051 Quick Disconnect, Socket Plug



MATERIALS AND FINISHES

- Contacts: copper alloy/gold
- Insulators: superior rigid dielectric
- Body: copper alloy/gold
- Finger ferrule: copper alloy/electroless nickel
- Spring: stainless steel

PERFORMANCE SPECIFICATIONS


- Operating temperature: -65°C to 150°C
- Mates with 853-052 and 853-054

NOTES

1. Contact factory to inquire about use with other cables.
2. Crimp tools:
 - » Inner contacts: 809-464
 - » Die: 859-205

PART NUMBER DEVELOPMENT		
Sample Part Number	853-051	-01
Series	853-051 = Quick Disconnect, Socket Plug	
Dash No	-01 = 963-069-26 cable -02 = 963-068-26 cable	

RECOMMENDED CABLES						
Dash No	Cable P/N	Cable Construction	Wire Gauge	Max Overall Size	Crimp Die	Assembly Instructions
-01	963-069-26	Double Shielded Parallel Pair	26	.133 x .083	859-205	AI85153
-02	963-068-26	Double Shielded Twisted Pair	26	.133 x .083	859-205	AI85153

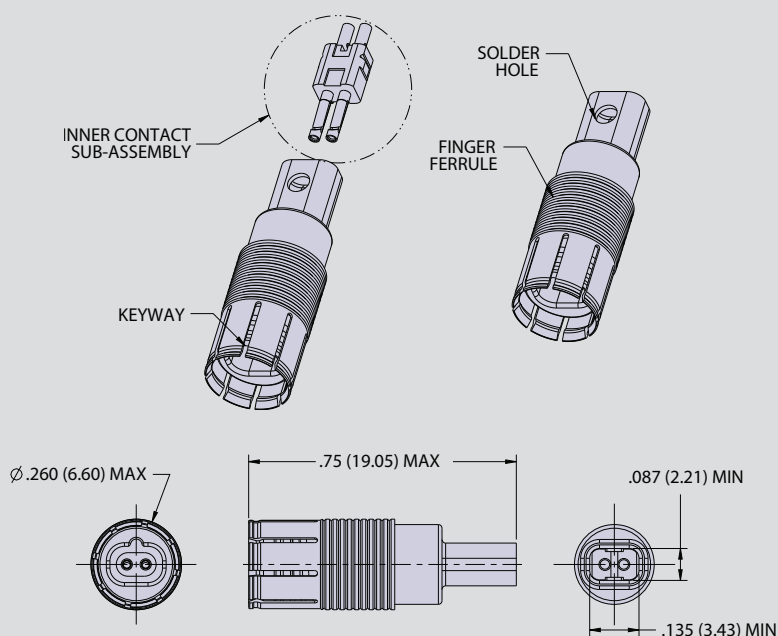

VERSALINK BRIDGE