

MICRO-CRIMP RECTANGULAR CONNECTORS

Series 790 High-Density

SERIES™
790
HD

790-046

Cable Plug with Banding Platform

- ◆ Crimp, Rear-Release
- ◆ Socket Contacts
- ◆ Banding Platform



Banding platform. 790-046 cable plug has integral platform for attaching cable braid with Band-Master ATS banding strap, sold separately. Snap-in, rear-release M39029-type crimp socket contacts are packaged with connector. High-density size 23 contacts are on .075 inch (1.9mm) centers and accept AWG 22-28 wire. Size 16 and size 12 cavities accept power contacts (supplied with connector) or coaxial RF contacts (ordered separately). Rear grommet provides environmental protection.

- Aerospace-grade microminiature connector with M39029-type contacts
- 40 insert arrangements with up to 102 contacts
- Environmental

INSERT ARRANGEMENTS

FULL COMPLEMENT OF CONTACTS	#8, #12 OR #16 CONTACTS PURCHASED SEPARATELY	No. of Contacts			
		#23	#16	#12	#8
A-5		5			
B-2P2	B-2W2		2		
B-9		9			
C-13		13			
D-15		15			
D-3P3	D-3W3		3		
D-7P2	D-7W2	5	2		
E-11P2	E-11W2	9	2		
E-19		19			
E-7P3	E-7W3	4	3		
F-14P3	F-14W3	11	3		
F-15P2	F-15W2	13	2		
F-23		23			
F-5P5	F-5W5		5		
G-13P2	G-13W2	11		2	
G-21P1	G-21W1	20		1	
G-3P3	G-3W3			3	
G-33		33			
H-10P4	H-10W4	6		4	
H-29P7	H-29W7	22	7		
H-36P2	H-36W2	34		2	
H-51P1	H-51W1	50		1	
H-54P2	H-54W2	52	2		
H-5P5	H-5W5			5	
H-66		66			
J-17P4	J-17W4	13	4		
J-25P2	J-25W2	23	2		
J-33		33			
J-7P7	J-7W7		7		
K-27P4	K-27W4	23	4		
K-35P2	K-35W2	33	2		
K-43		43			
K-9P9	K-9W9		9		
L-22P4	L-22W4	18		4	
L-48P2	L-48W2	46		2	
L-6P6	L-6W6			6	
L-78		78			
M-17P17	M-17W17		17		
M-102		102			
M-4P4	M-4W4				4

HOW TO ORDER

Sample Part Number		790-046S	J-17P4	E	MT	P
Basic Part Number	790-046S Cable Plug, Socket Contacts					
Shell Size-Insert Arr.	See "Insert Arrangements" Table					
EMI Spring	E EMI Spring <i>Shell finishes M and MT only</i> N No EMI Spring					
Shell Finish	M Electroless Nickel MT Nickel / PTFE N Olive Drab Cadmium TZ Tin-Zinc ZR Black Zinc-Nickel					
Hardware Option Table 1	B Thru-Holes <i>No hardware</i> M Jackscrews <i>Socket head male</i> MF Screwlocks <i>Socket head male</i> P Female Jackposts S Jackscrews <i>Slot head male</i> SF Screwlocks <i>Slot head male</i>					

TABLE 1 HARDWARE OPTIONS

B No Hardware Thru Mounting Holes	M Jackscrew Socket Head	MF Screwlock Socket Head	P Female Jackpost With Nut and Lockwasher	S Jackscrew Slot Head	SF Screwlock Slot Head

Screwlocks allow connector to be plugged in before the screws are tightened. Jackscrews must be tightened in order to mate connector.

RATINGS

- Voltage (DWV): size 23 contacts 750 VAC, Size 8, 12 and 16: 1800 VAC
- Current: #23 5A, #16 13A, #12 23A, #8 46A
- Operating temperature: -65 to +150 °C
- Durability: 500 mating cycles
- Shock: 300 g
- Vibration: 20 g random
- Altitude immersion: 75,000 feet
- Ingress protection: IP67

CONSTRUCTION

- Socket Contacts: Copper alloy, gold over nickel finish. Stainless steel hood.
- Shell: Aluminum
- Insulators: High performance thermoplastic
- Wire grommet: Fluorosilicone/silicone blend
- EMI spring: Stainless steel, gold plated
- Contact retaining clip: Beryllium copper, unplated
- Hardware: Stainless steel

MICRO-CRIMP RECTANGULAR CONNECTORS


Series 790 High-Density



790-046

Cable Plug with Banding Platform

- ◆ Crimp, Rear-Release
- ◆ Socket Contacts
- ◆ Integral Banding Platform

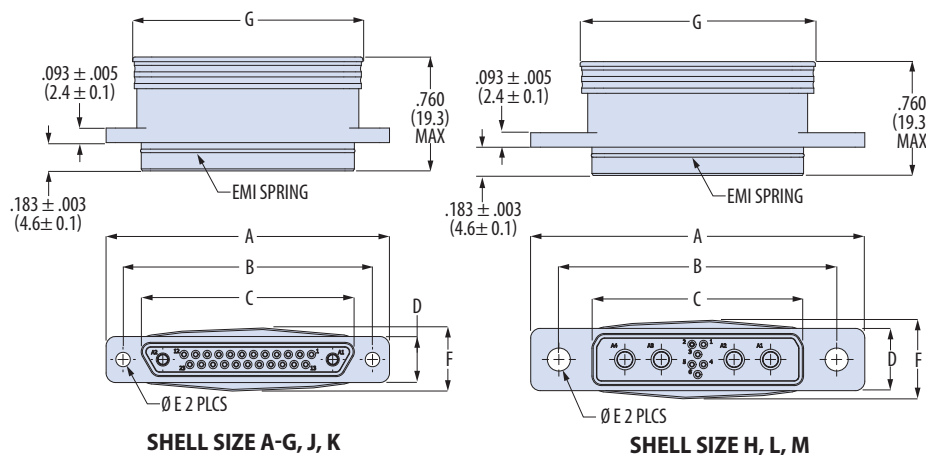

Shell Size	A Max		B ± .005 (0.1)		C Max		D Max		Ø E ± .004 (0.1)		F Max		G Max	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
A	.785	19.9	.565	14.4	.335	8.5	.308	7.8	.092	2.3	.370	9.4	.450	11.4
B	.935	23.7	.715	18.2	.485	12.3	.308	7.8	.092	2.3	.380	9.7	.600	15.2
C	1.085	27.6	.865	22.0	.635	16.1	.308	7.8	.092	2.3	.400	10.2	.750	19.1
D	1.185	30.1	.965	24.5	.735	18.7	.308	7.8	.092	2.3	.410	10.4	.850	21.6
E	1.335	33.9	1.115	28.3	.885	22.5	.308	7.8	.092	2.3	.410	10.4	1.000	25.4
F	1.485	37.7	1.265	32.1	1.015	25.8	.308	7.8	.092	2.3	.420	10.7	1.150	29.2
G	1.435	36.4	1.215	30.9	1.010	25.7	.395	10.0	.092	2.3	.500	12.7	1.140	29.0
H	2.175	55.2	1.800	45.7	1.385	35.2	.410	10.4	.149	3.8	.520	13.2	1.535	39.0
J	1.845	46.9	1.615	41.0	1.390	35.3	.308	7.8	.092	2.3	.420	10.7	1.500	38.1
K	2.240	56.9	2.015	51.2	1.795	45.6	.308	7.8	.092	2.3	.440	11.2	1.900	48.3
L	2.420	61.5	2.036	51.7	1.623	41.2	.410	10.4	.149	3.8	.530	13.5	1.770	45.0
M	2.575	65.4	2.200	55.9	1.675	42.5	.470	11.9	.172	4.4	.600	15.2	1.835	46.6

CRIMP CONTACTS AND TOOLS

Contacts are bulk packed with connector. Spare contacts are not included with connector and are ordered separately. See "Contacts and Tools" section for additional information.

Contact Size	Socket Contact Part No.	AWG Wire Size	Installing and Removal Tool	Tool	Crimp Tools Positioner	Die Assembly
23	809-002	22 – 28	809-088	809-015 (M22520/2-01)	809-005 (K1461)	—
16	857-448-16	16 – 20	809-131 (M81969/14-03)	809-136 (M22520/1-01)	809-137 (M22520/1-04)	—
12	857-448-12	12 – 14	809-132 (M81969/14-04)	809-136 (M22520/1-01)	809-137 (M22520/1-04)	—
8	850-138F	8	859-049 (M81969/14-12)	859-025 (M22520/23-01)	859-046 (WA23-395L)	859-026 (M22520/23-02)

Application Note

Panel Mounting

For panel mounting, specify connector with Hardware Option N (thru-holes). Use rear panel mount jackpost **799-117**. See page F-18 for jackpost ordering information, page F-19 for panel cutout dimensions.

HARDWARE DIMENSIONS

Shell Size	Thread Size
A – G, J, K	#2-56
H, L	#4-40
M	#6-32

P
Female Jackpost with Hex Nut and Lockwasher

M S
Jackscrew

MF SF
Screwlock


SHIELD BAND

Band is not included with connector. Order separately.

Use Micro Band strap to terminate cable braid directly to connector. Stainless steel band strap provides fast, cost-effective and highly reliable termination of braided metallic shielding.



Micro Band Strap Micro Band Tool 601-101

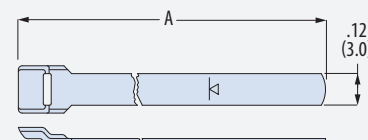

A Length		Fits up to Dia.		Band Strap Part Number	
in	mm	in	mm	Flat	Pre-coiled
8	203	.88	22.4	601-060	601-061
14	356	1.88	47.7	601-064	601-065