

MICRO-CRIMP RECTANGULAR CONNECTORS

Series 791 Scoop-Proof

SERIES™
791
Scoop-Proof

791-004

Cable Plug with Banding Platform

- ◆ Crimp, rear-release
- ◆ Socket contacts
- ◆ Banding platform



Banding platform. 791-004 cable plug has integral platform for attaching cable braid with **Band-Master ATS®** banding strap, sold separately. Snap-in, rear-release M39029-type crimp contacts are packaged with connector. High-density size 23 contacts are on .075 inch (1.9mm) centers and accept AWG 22-28 wire. Size 16 and size 12 cavities accept power contacts (supplied with connector) or coaxial RF contacts (ordered separately). Rear grommet provides environmental protection.

- Aerospace-grade ultraminiature connector with rugged scoop-proof duo-lobe shell
- Environmental
- 42 layouts with up to 153 contacts
- M39029-type crimp contacts

INSERT ARRANGEMENTS

FULL COMPLEMENT OF CONTACTS	#8, #12 OR #16 CONTACTS PURCHASED SEPARATELY	No. of Contacts			
		#23	#16	#12	#8
A-5		5			
B-2P2	B-2W2		2		
B-9		9			
C-13		13			
D-15		15			
D-3P3	D-3W3		3		
D-7P2	D-7W2	5	2		
E-11P2	E-11W2	9	2		
E-19		19			
E-7P3	E-7W3	4	3		
F-14P3	F-14W3	11	3		
F-15P2	F-15W2	13	2		
F-23		23			
F-5P5	F-5W5		5		
G-13P2	G-13W2	11		2	
G-21P1	G-21W1	20		1	
G-3P3	G-3W3			3	
G-33		33			
H-10P4	H-10W4	6		4	
H-29P7	H-29W7	22	7		
H-36P2	H-36W2	34		2	
H-51P1	H-51W1	50		1	
H-54P2	H-54W2	52	2		
H-5P5	H-5W5			5	
H-66		66			
J-17P4	J-17W4	13	4		
J-25P2	J-25W2	23	2		
J-33		33			
J-7P7	J-7W7		7		
K-27P4	K-27W4	23	4		
K-35P2	K-35W2	33	2		
K-43		43			
K-9P9	K-9W9		9		
L-22P4	L-22W4	18		4	
L-48P2	L-48W2	46		2	
L-6P6	L-6W6			6	
L-78		78			
M-17P17	M-17W17		17		
M-102		102			
M-4P4	M-4W4				4
N-13P13	N-13W13			13	
N-153		153			

HOW TO ORDER

Sample Part Number

791-004S

H-66

M

P

B

Basic Part Number

791-004S

Cable Plug, Socket Contacts,
with Banding Platform

Shell Size-Insert Arr.

See "Insert Arrangements" Table

Shell Finish

M Electroless Nickel
MT Nickel / PTFE
N Olive Drab Cadmium
TZ Tin-Zinc
ZR Black Zinc-Nickel






Hardware Option

K Extended Jackscrews *Slot head male*
L Jackscrews *Socket head male*
N Thru-Hole *No Hardware*
P Female Jackposts
S Screwlocks *Socket head male*
T Extended Screwlocks *Slot head male*

Polarization Key Option

Enter Letter Designator for Position **A, B, C, D, E,** or **F** per Mod Code 555
(see page B-8 for details) **Omit** for none

TABLE 1 HARDWARE OPTIONS

					
N	K	L	P	S	T
No Hardware Thru Mounting Holes	Extended Jackscrew Slot Head	Jackscrew Socket Head	Female Jackpost With Nut and Lockwasher	Screwlock Socket Head	Extended Screwlock Slot Head

Screwlocks allow connector to be plugged in before the screws are tightened. Jackscrews must be tightened in order to mate connector.

RATINGS

- Voltage (DWV): size 23 contacts 750 VAC, Size 8, 12 and 16: 1800 VAC
- Current: #23 5A, #16 13A, #12 23A, #8 46A
- Operating temperature: -65 to +150 °C
- Durability: 500 mating cycles
- Shock: 300 g
- Vibration: 20 g random
- Altitude immersion: 75,000 feet
- Ingress protection: IP67

CONSTRUCTION

- Contacts: Copper alloy, gold over nickel finish
- Shell: Aluminum
- Insulators: High performance thermoplastic
- Wire grommet: Fluorosilicone/silicone blend
- Contact retaining clip: Beryllium copper, unplated
- Hardware: Stainless steel

MICRO-CRIMP RECTANGULAR CONNECTORS

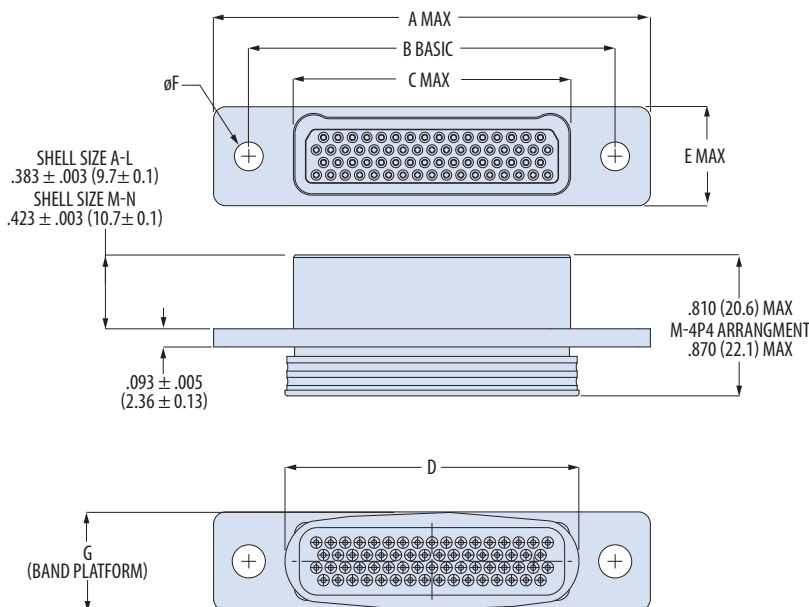
Series 791 Scoop-Proof



791-004

Cable Plug with Banding Platform

- ◆ Crimp, rear-release
- ◆ Socket contacts
- ◆ Banding platform



Shell Size	A Max		B ± .005 (0.1)		C Max		D ± .010 (0.3)		E Max		F ± .005 (0.1)		G ± .010 (0.3)	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
A	1.040	26.4	.750	19.1	.415	10.5	.440	11.2	.415	10.5	.150	3.8	.360	9.1
B	1.190	30.2	.900	22.9	.565	14.4	.590	15.0	.415	10.5	.150	3.8	.370	9.4
C	1.340	34.0	1.050	26.7	.715	18.2	.740	18.8	.415	10.5	.150	3.8	.390	9.9
D	1.415	35.9	1.125	28.6	.790	20.1	.840	21.3	.415	10.5	.150	3.8	.400	10.2
E	1.565	39.8	1.275	32.4	.940	23.9	.990	25.1	.415	10.5	.150	3.8	.400	10.2
F	1.715	43.6	1.425	36.2	1.090	27.7	1.140	29.0	.415	10.5	.150	3.8	.410	10.4
G	1.678	42.6	1.388	35.3	1.052	26.7	1.130	28.7	.500	12.7	.150	3.8	.490	12.4
H	2.275	57.8	1.900	48.3	1.442	36.6	1.525	38.7	.520	13.2	.173	4.4	.510	13.0
J	2.090	53.1	1.800	45.7	1.465	37.2	1.490	37.8	.415	10.5	.150	3.8	.410	10.4
K	2.465	62.6	2.175	55.2	1.840	46.7	1.890	48.0	.415	10.5	.150	3.8	.430	10.9
L	2.511	63.8	2.136	54.3	1.678	42.6	1.760	44.7	.520	13.2	.173	4.4	.520	13.2
M	2.580	65.5	2.200	55.9	1.745	44.3	1.825	46.4	.635	16.1	.198	5.0	.590	15.0
N	3.040	77.2	2.600	66.0	2.115	53.7	2.220	56.4	.722	18.3	.248	6.3	.680	17.3

CRIMP CONTACTS AND TOOLS

Contacts are bulk packed with connector. Spare contacts are not included with connector and should be ordered separately if required. See "Contacts and Tools" section for additional information.

Contact Size	Socket Contact Part No.	AWG Wire Size	Installing and Removal Tool	Tool	Crimp Tools	Die Assembly
23	809-002	22 – 28	809-088	809-015 (M22520/2-01)	809-005 (K1461)	—
16	857-448-16	16 – 20	809-131 (M81969/14-03)	809-136 (M22520/1-01)	809-137 (M22520/1-04)	—
12	857-448-12	12 – 14	809-132 (M81969/14-04)	809-136 (M22520/1-01)	809-137 (M22520/1-04)	—
8	850-138F	8	859-049 (M81969/14-12)	859-025 (M22520/23-01)	859-046 (WA23-395L)	859-026 (M22520/23-02)

Application Note Panel Mounting

For panel mounting, specify connector with Hardware Option N (thru-holes). Use rear panel mount jackpost (799-117). See page F-18 for jackpost ordering information, page F-19 for panel cutout dimensions.


Application Note Polarization Key Positions

See Mod Code 555 pg. B-8 for details




HARDWARE DIMENSIONS

Shell Size	Thread Size
A – G, J, K	#4-40
H, L	#6-32
M	#8-32
N	#10-32

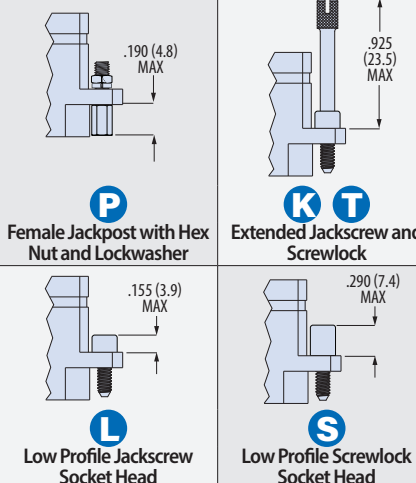

SHIELD BAND

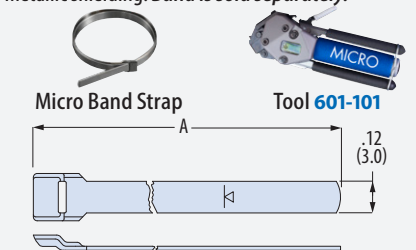Use Micro Band strap to terminate cable braid directly to connector. Stainless steel band strap provides fast, cost-effective and highly reliable termination of braided metallic shielding. *Band is sold separately.*



A Length		Fits up to Dia.		Band Strap Part Number	
in	mm	in	mm	Flat	Pre-coiled
8	203	.88	22.4	601-060	601-061
14	356	1.88	47.7	601-064	601-065