

MICRO-CRIMP RECTANGULAR CONNECTORS

Series 792 High-Speed

SERIES™
792
High-Speed

792-005

PCB Plug, Straight Tails, El Ochito®

- ◆ Octaxial PC tail contacts
- ◆ Straight PCB tails
- ◆ Socket contacts



792-005 plug has El Ochito® high-speed octaxial PC tail socket contacts for thru-hole printed circuit board termination. Contacts are potted with epoxy. Machined aluminum shell has integral standoff and threaded holes for attachment to PC board. Combo arrangements have #23 contacts.

- Aerospace-grade rectangular PCB connector with high speed size 8 octaxial contacts
- 1–9 data ports
- Rugged duo-lobe aluminum shell
- Environmental

INSERT ARRANGEMENTS

Thermoplastic Insert	Grounded All-Aluminum	No. of Contacts	
		#8	#23
A-1W1	A-1G1	1	–
A-3W1		1	2
B-23W1		1	22
B-2W2	B-2G2	2	–
B-6W2		2	4
C-24W2		2	22
C-3W3	3G3	3	–
C-9W3		3	6
D-27W3		3	24
D-4W4	D-4G4	4	–
D-12W4		4	8
E-5W5	E-5G5	5	–
E-15W5		5	10
E-45W3		3	42
F-9W9	F-9G9	9	–
F-31W9		9	22

OCHITO PROTOCOLS



WHITE
1000 / 10G /
40GBASE-T




BLUE
USB 3.0



RED
HDMI, SATA,
DisplayPort

The Ochito octaxial contact is color-coded to signify the data protocol. White is used for high speed Ethernet, blue is used for USB 3.0, and red is used for multi gigabit 100 ohm protocols including HDMI, DisplayPort and SATA. The connector part number includes a code from the **Protocol Code** table. This code enables combinations of protocols as shown in the examples below.

Code AE




Code AQ



Application Note

Polarization Key Positions

See Mod Code 1104 pg. C-8 for details



HOW TO ORDER

Sample Part Number		792-005S	D-4P4	M	R3	AA	B	
Basic Part Number	792-005S PCB Plug, Straight Tails, Octaxial Socket Contacts							
Shell Size-Insert Arr.	See “Insert Arrangements” Table							
Shell Finish	M Electroless Nickel							
	MT Nickel / PTFE							
	N Olive Drab Cadmium							
	TZ Tin-Zinc							
	ZR Black Zinc-Nickel							
Jackpost Option Table 1	N No Jackposts P Female Jackposts R1 Rear Panel Mount Jackposts .032 (0.81) Panel Thickness R2 Rear Panel Mount Jackposts .050 (1.27) Panel Thickness R3 Rear Panel Mount Jackposts .062 (1.59) Panel Thickness R4 Rear Panel Mount Jackposts .080 (2.03) Panel Thickness R5 Rear Panel Mount Jackposts .093 (2.36) Panel Thickness R6 Rear Panel Mount Jackposts .125 (3.18) Panel Thickness							
Protocol Code	See “Protocol Code” table on next page							
Polarization Key Option	Enter Letter Designator for Position A, B, C, D, E, F, G, H, J, or K per Mod Code 1104 (see page C-8 for details) Omit for none							

TABLE 1 JACKPOST OPTION

N No Jackpost Threaded Hole 10-32 UNF-2B .150 (3.81) min. depth		P Female Jackpost #8-32 UNC-2B		R1 - R6 Rear Panel Jackpost #8-32 UNC-2B	
--	--	---	--	--	--

RATINGS

- Voltage (DWV): 500 VAC
- Current: #23 5A
- Operating temperature: -65 to +125 °C
- Durability: 500 mating cycles
- Shock: 300 g
- Vibration: 20 g random

CONSTRUCTION

- #23 Contacts: Copper alloy, gold over nickel finish, stainless steel hood
- Ochito contact: Copper alloy, gold over nickel finish. Insulators are high performance thermoplastic. Ochito white has nickel-plated copper alloy splines.
- Shell: Aluminum
- Insulator: High performance thermoplastic
- Face seal: Fluorosilicone/silicone blend
- Encapsulant: Epoxy
- Hardware: Stainless steel, passivated

MICRO-CRIMP RECTANGULAR CONNECTORS

Series 792 High-Speed




792-005

PCB Plug, Straight Tails, El Ochito®


- ◆ Octaxial PC tail contacts
- ◆ Straight PCB tails
- ◆ Socket contacts

PROTOCOL CODE									
Code	Cavity								
	A1	A2	A3	A4	A5	A6	A7	A8	A9
AA	W	W	W	W	W	W	W	W	W
AB	B	W	W	W	W	W	W	W	W
AC	R	W	W	W	W	W	W	W	W
AD	B	B	W	W	W	W	W	W	W
AE	R	B	W	W	W	W	W	W	W
AF	R	R	W	W	W	W	W	W	W
AG	B	B	B	W	W	W	W	W	W
AH	R	B	B	W	W	W	W	W	W
AJ	R	R	B	W	W	W	W	W	W
AK	R	R	R	W	W	W	W	W	W
AL	B	B	B	B	W	W	W	W	W
AM	R	B	B	B	W	W	W	W	W
AN	R	R	B	B	W	W	W	W	W
AP	R	R	R	B	W	W	W	W	W
AQ	R	R	R	R	W	W	W	W	W
AR	B	B	B	B	B	W	W	W	W
AS	R	B	B	B	B	W	W	W	W
AT	R	R	B	B	B	W	W	W	W
AV	R	R	R	B	B	W	W	W	W
AW	R	R	R	R	B	W	W	W	W
AX	R	R	R	R	R	W	W	W	W
AY	B	B	B	B	B	B	W	W	W
AZ	R	B	B	B	B	B	W	W	W
BA	R	R	B	B	B	B	W	W	W
BB	R	R	R	B	B	B	W	W	W
BC	R	R	R	R	B	B	W	W	W
BD	R	R	R	R	R	B	W	W	W
BE	R	R	R	R	R	R	W	W	W
BF	B	B	B	B	B	B	B	W	W
BG	R	B	B	B	B	B	B	W	W
BH	R	R	B	B	B	B	B	W	W
BJ	R	R	R	B	B	B	B	W	W
BK	R	R	R	R	B	B	B	W	W
BL	R	R	R	R	R	B	B	W	W
BM	R	R	R	R	R	R	B	W	W
BN	R	R	R	R	R	R	R	W	W
BP	B	B	B	B	B	B	B	W	W
BQ	R	B	B	B	B	B	B	W	W
BR	R	R	B	B	B	B	B	W	W
BS	R	R	R	B	B	B	B	W	W
BT	R	R	R	R	B	B	B	W	W
BV	R	R	R	R	R	B	B	W	W
BW	R	R	R	R	R	R	B	W	W
BX	R	R	R	R	R	R	R	B	W
BY	R	R	R	R	R	R	R	R	W
BZ	B	B	B	B	B	B	B	B	B
CA	R	B	B	B	B	B	B	B	B
CB	R	R	B	B	B	B	B	B	B
CC	R	R	R	B	B	B	B	B	B
CD	R	R	R	R	B	B	B	B	B
CE	R	R	R	R	R	B	B	B	B
CF	R	R	R	R	R	R	B	B	B
CG	R	R	R	R	R	R	R	B	B
CH	R	R	R	R	R	R	R	R	B
CJ	R	R	R	R	R	R	R	R	R

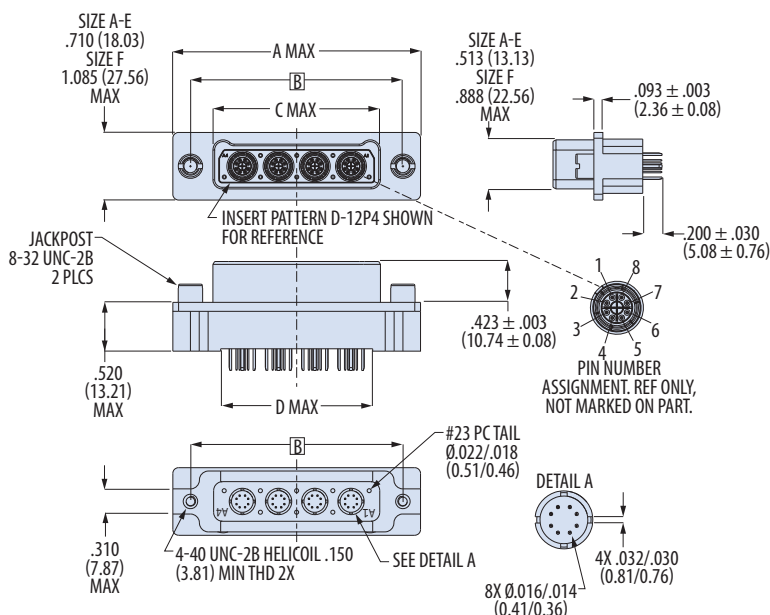


Shell Size	A Max		B ± .005 (0.1)		C Max		D Max		E ± .002 (0.05)	
	in	mm	in	mm	in	mm	in	mm	in	mm
A	1.455	36.96	1.075	27.31	.615	15.62	.460	11.68	.725	18.42
B	1.830	46.48	1.450	36.83	.990	25.15	.835	21.21	1.100	27.94
C	2.205	56.01	1.825	46.36	1.365	34.67	1.210	30.73	1.475	37.47
D	2.580	65.53	2.200	55.88	1.740	44.20	1.585	40.26	1.850	46.99
E	2.955	75.06	2.575	65.41	2.115	53.72	1.960	49.78	2.225	56.52
F	2.955	75.06	2.575	65.41	2.115	53.72	1.960	49.78	2.225	56.52

PANEL CUTOUT FOR REAR PANEL MOUNTING

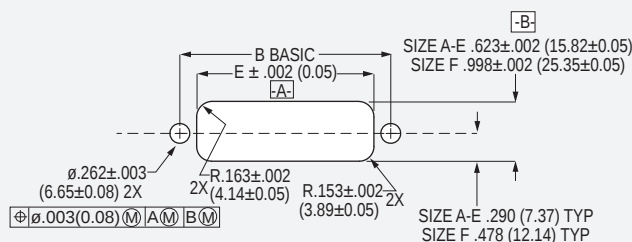

REAR PANEL JACKPOST R1-R6

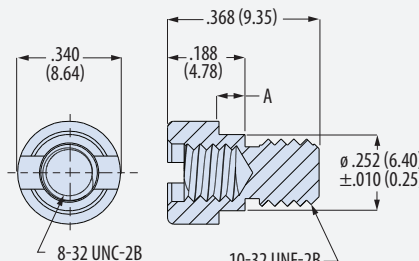

Code	A ± .010 (0.25)	
	in	mm
R1	.032	0.81
R2	.050	1.27
R3	.062	1.59
R4	.080	2.03
R5	.093	2.36
R6	.125	3.18

MICRO-CRIMP RECTANGULAR CONNECTORS

Series 792 High-Speed

SERIES™
792
High-Speed

792-005

PCB Plug, Straight Tails, El Ochito®

- ◆ Octaxial PC tail contacts
- ◆ Straight PCB tails
- ◆ Socket contacts



PCB FOOTPRINTS FOR 792-005 CONNECTOR

⚠ Optimizing PCB Design


See Glenair Application Note AN0002
Design and Installation of El Ochito PCB Connectors for recommended solder pad sizing, trace routing, and connector installation.

<https://cdn.glenair.com/test-reports-and-technical-information/pdf/application-note/an0002.pdf>


PCB hole patterns are shown for the **component mounting side** of the circuit board.

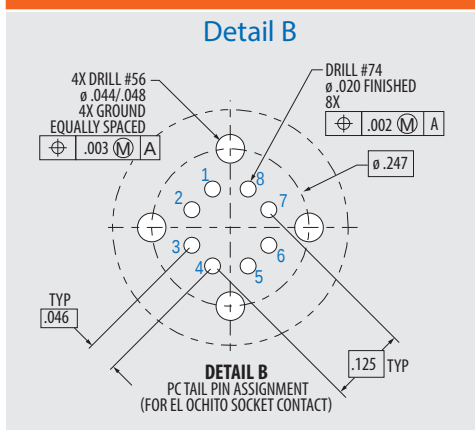


A-1P1 A-1G1



A-3P1




C-3P3 C-3G3

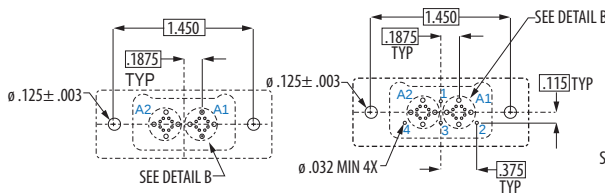


B-2P2 B-2G2


B-6P2




B-23P1




C-9P3




C-24P2




D-4P4 D-4G4

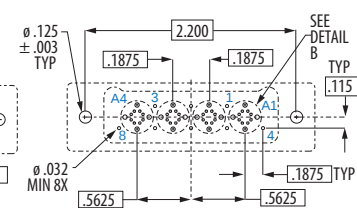


D-12P4

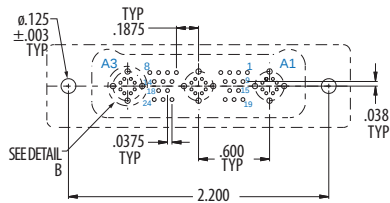


D-27P3

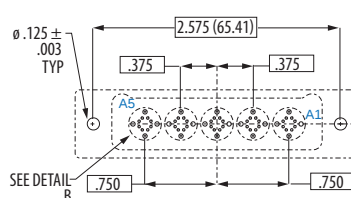


E-5P5 E-5G5

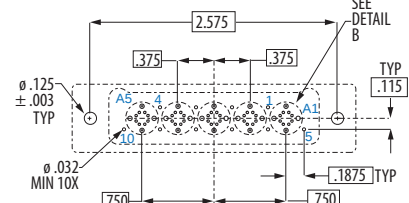


E-15P5

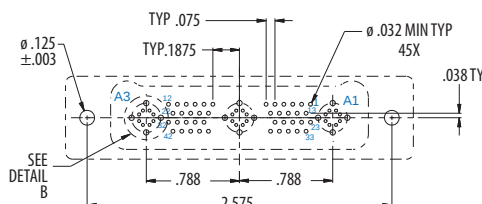

E-45P3

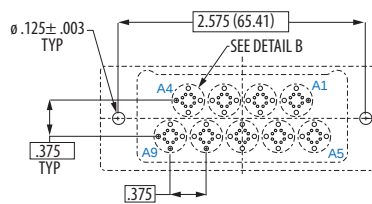

F-9P9 F-9G9

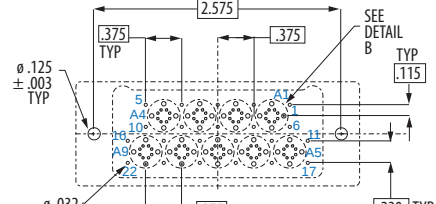

F-31P9