



181-133 MT Elite Ferrule Kits

PRIZM[®] MT and MT Elite[®]

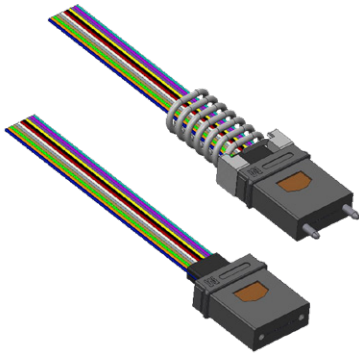

HOW TO ORDER ELITE MT FERRULE KIT					
Sample Part Number		181-133	-126	-12	P
Basic Part Number	Elite MT Ferrule kit				
Fiber type	-126, -1253, -1253A (See Fiber Type and Number table)				
Number of Fibers	-12, -24 (See Fiber Type and Number table)				
Ferrule Style	P = Male (use with Plug) S = Female (use with Receptacle)				

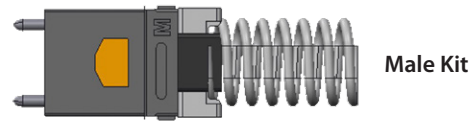

MATERIAL/FINISH NOTES

- Ferrule: Polyphenylene Sulfide Resin
- Pin Clamp, Spring: Stainless Steel
- Boot: TPE

FIBER TYPE AND NUMBER						
Dash No.	Fiber Type	End Face	Fiber Size Core/Cladding	No. of Fibers	Ferrule Identification	Pin Clamp Identification (Male Kit only)
-126	MM	PC	50/125 62.5/125	12 24	M-ME12 M-ME24	1 Through Hole
-1253	SM	PC	9/125	12	E-E12	2 Through Holes
-1253A	SM	APC	9/125	12	E-E12	2 Through Holes