



## **Series 80 Mighty Mouse Filter Connector Normal and Alternate Key Positions**

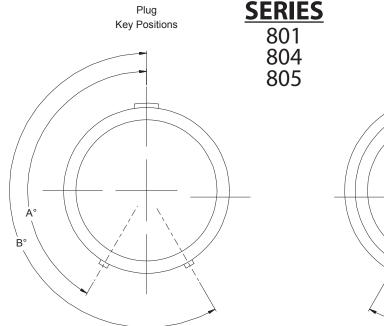

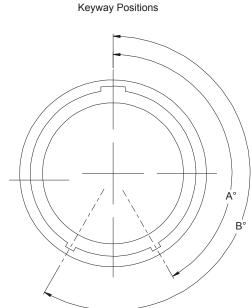

Receptacle

| Series 80 Mighty Mouse<br>Alternate Key Positions |              |      |      |
|---|--------------|------|------|
| Key<br>Position                                   | Notes        | A°   | В°   |
| Α   | Normal       | 150° | 210° |
| В   | Alternate #1 | 75°  | 210° |
| С   | Alternate #2 | 95°  | 230° |
| D   | Alternate #3 | 140° | 275° |
| E   | Alternate #4 | 75°  | 275° |
| F   | Alternate #5 | 95°  | 210° |
| U   | Universal    | -    | -    |

1. Materials/Finishes: Shells, Barrel, Coupling Nut, Jam Nut - See Table I Insulators - High grade rigid dielectric/N.A.

Seals - Fluorosilicone

Contacts: Copper alloy 50µ" Gold over 50µ" Nickel

- 2. Assembly to be identified with Glenair's name, part number, and date code space permitting.
- 3. All contacts to have identical filter value. Other filter arrangements available, contact factory.
- 4. Electrical Ratings: DWV- 300 VDC; Standard Operating Voltage 200 VDC (Filter class X, Y and Z are 250 VDC)
- 5. Insulation Resistance: 5000 MegOhms Min. at 200 VDC.
- 6. Operating Temperature: -55°C to +125°C (Env Class Connectors)
- 7. Other filter styles (C-L, L-C, Unbalanced Pi, Multi-Stage, Multi-Value) are available, please consult the factory.

Dimensions in inches (millimeters) and are subject to change without notice.

© 2013 Glenair, Inc. **EMI/EMP Filter Connectors** U.S. CAGE Code 06324 Rev. 06.02.15 Printed in U.S.A.