




SERIES 80

Mighty Mouse Contacts and Tools



Contact Installation and Removal Tools

CONTACT INSERTION AND REMOVAL TOOLS

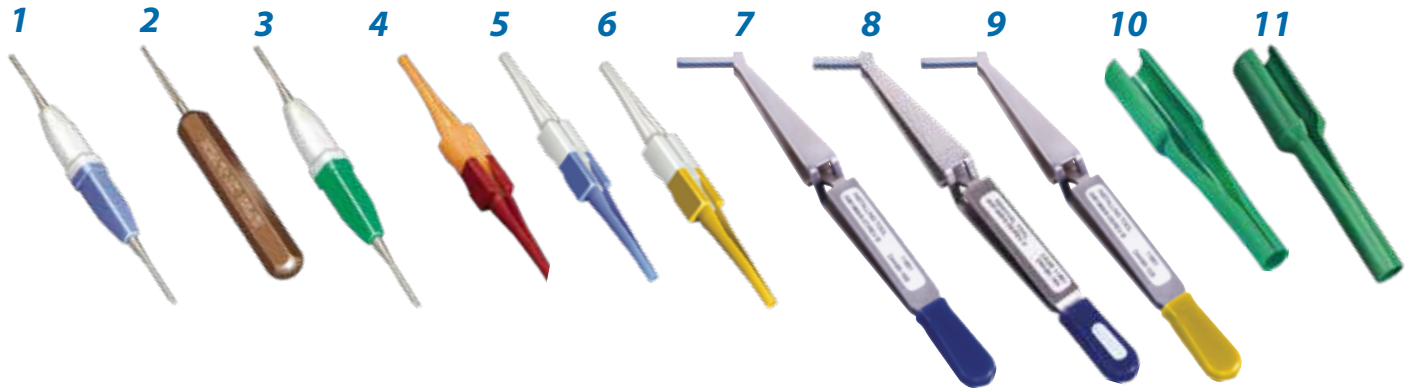

| Figure | Size | Type | Glenair Part Number | Military Part Number |
|--------|--------------------|----------------------|--|----------------------|
| 1 | #23 | Installation/Removal | 809-088 | N/A |
| 2 | #23 | Installation Only | 809-013 | N/A |
| 3 | #20HD | Installation/Removal | 809-203 (Append D for Delrin tip) | N/A |
| 4 | #20 | Installation/Removal | 809-207 | M81969/14-10 |
| 5 | #16 power and coax | Installation/Removal | 809-131 | M81969/14-03 |
| 6 | #12 power and coax | Installation/Removal | 809-132 | M81969/14-04 |
| 7 | #16 coax / power | Installation Only | N/A | M81969/8-07 |
| 8 | #16 coax / power | Removal Only | N/A | M81969/8-08 |
| 9 | #12 coax / power | Installation Only | N/A | M81969/8-09 |
| 10 | #12 coax / power | Removal Only | N/A | M81969/8-10 |
| 11 | #8 power | Removal Only | 859-049 | M81969/14-12 |

CONTACTS AND TOOLS

1 Installation/Removal Tool for #23 Contacts. Features molded plastic grips and sturdy stainless steel tips. Blue/White molded handle.

2 Installation Tool for #23 Contacts. This tool features anodized aluminum handle and stainless steel insertion tip.

3 Installation/Removal Tool for #20HD Contacts. This tool features molded plastic grips and sturdy stainless steel or Delrin tips. Molded handle in Green/White for SS or Green/Blue for Delrin tips.

4 Installation/Removal Tool for #20 Contacts. Molded plastic. Orange extraction tip, red insertion tip.

5 Installation/Removal Tool for #16 Contacts. Use with size #16 coaxial or power contacts. Economical molded plastic. White extraction tip, blue insertion tip.

6 Installation/Removal Tool for #12 Contacts. Use with size #12 coaxial or power contacts. Molded plastic. White extraction tip, yellow insertion tip.

7 Installation Tool for #16 coax and #12, 50 Ohm matched impedance coax contacts. Metal tool.

8 Removal Tool for #16 coax and #12, 50 Ohm matched impedance coax contacts. Molded plastic.

9 Installation Tool for #12 coax contacts. Metal tool.

10 Removal Tool for #12 coax and #8 power contacts. Metal tool.

11 Removal Tool for #12 coax and #8 power contacts. Molded plastic.