


SERIES 802, 3500 PSI SUBMERSIBLE AquaMouse Connectors and Cables




Contact Arrangements Mating Face of Pin Insert Shown


SIZE #23 CONTACTS, TESTED AT 750 VAC




Insert Arrangement	5-3	6-4	6-6	6-7	7-10
No. of Contacts	3	4	6	7	10

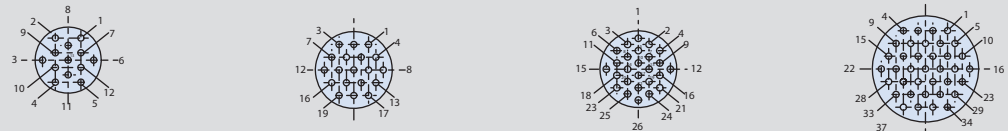

Insert Arrangement	8-13	9-19	10-26	12-37
No. of Contacts	13	19	26	37

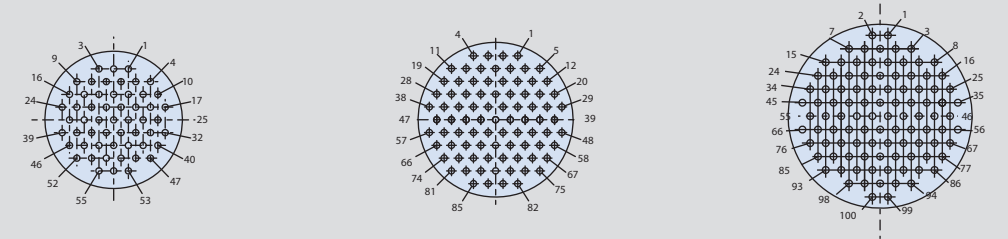


Insert Arrangement	14-55	15-85	19-100
No. of Contacts	55	85	100



Insert Arrangement	21-130
No. of Contacts	130

SERIES 802 AQUAMOUSE


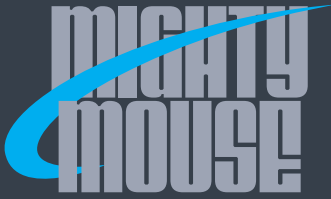


SERIES 802, 3500 PSI SUBMERSIBLE AquaMouse Connectors and Cables







Contact Arrangements Mating Face of Pin Insert Shown

SIZE #20HD CONTACTS, TESTED AT 1000 VAC






Insert Arrangement	6-23	7-25	8-28	9-210	12-220
No. of Contacts	3	5	8	10	20







Insert Arrangement	14-235	15-241	19-255	21-269
No. of Contacts	35	41	55	69


SIZE #16 CONTACTS, TESTED AT 1800 VAC



Insert Arrangement	6-1	8-2	9-4	10-5	12-7
No. of Contacts	1	2	4	5	7



Insert Arrangement	14-12	15-14	19-19	21-22
No. of Contacts	12	14	19	22






SERIES 802, 3500 PSI SUBMERSIBLE AquaMouse Connectors and Cables







Standard Contact Arrangements Mating Face of Pin Insert Shown

SIZE #12 CONTACTS, TESTED AT 1800 VAC







Insert Arrangement	7-1	10-2	12-2	12-3
No. of Contacts	1	2	2	3




Insert Arrangement	14-4	14-5	15-7	21-12
No. of Contacts	4	5	7	12

SIZE #8 CONTACT ARRANGEMENTS, TESTED AT 1800 VAC



Insert Arrangement	8-1	14-2	15-3	19-4	21-5
Metal Insert Arrangement	8G1	14G2	15G3	19G4	21G5
No. of Contacts	1	2	3	4	5




SERIES 802, 3500 PSI SUBMERSIBLE AquaMouse Connectors and Cables




Combo Contact Arrangements Mating Face of Pin Insert Shown

SIZE #20 AND SIZE #23, COMBO CONTACT ARRANGEMENTS, TESTED AT 750 VAC

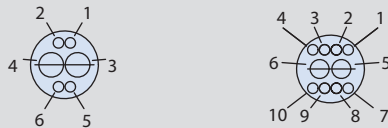


Insert Arrangement	8-200		9-201	
Contact Size	#20	#23	#20	#23
No. of Contacts	2	4	2	8

SIZE #16 AND SIZE #23, COMBO CONTACT ARRANGEMENTS, TESTED AT 750 VAC

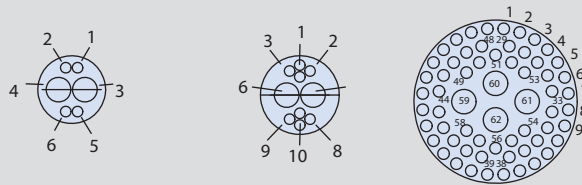


Insert Arrangement	9-200		10-202		15-206	
Contact Size	#16	#23	#16	#23	#16	#23
No. of Contacts	2	4	2	8	4	58

SIZE #12 AND SIZE #23, COMBO CONTACT ARRANGEMENTS, TESTED AT 750 VAC

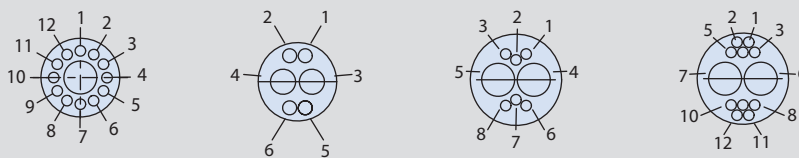

Insert Arrangement	10-200		10-201		12-200		12-201	
Contact Size	#12	#23	#12	#23	#12	#23	#12	#23
No. of Contacts	1	12	2	4	2	6	2	10

SERIES 802 AQUAMOUSE




SERIES 802, 3500 PSI SUBMERSIBLE AquaMouse Connectors and Cables

Combo Contact Arrangements Mating Face of Pin Insert Shown




SIZE #16 AND SIZE #23, COMBO CONTACT ARRANGEMENTS, TESTED AT 1300 VAC

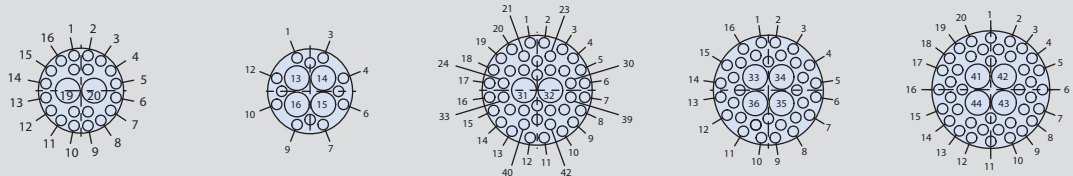


Insert Arrangement	12-202		12-203		14-204		14-205		15-203	
Contact Size	#16	#23	#16	#23	#16	#23	#16	#23	#16	#23
No. of Contacts	2	20	4	12	2	40	4	32	4	40

SIZE #12 AND SIZE #23, COMBO CONTACT ARRANGEMENTS, TESTED AT 1300 VAC

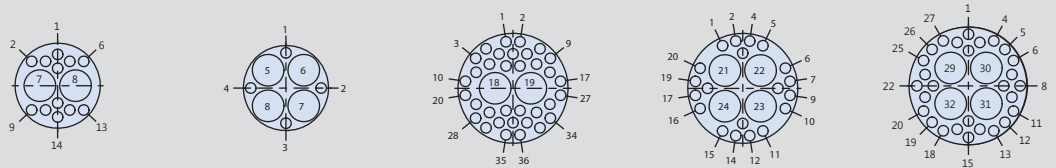


Insert Arrangement	12-204		12-205		14-206		14-207		15-204	
Contact Size	#12	#23	#12	#23	#12	#23	#12	#23	#12	#23
No. of Contacts	2	12	4	4	2	34	4	20	4	28

SIZE #8 AND SIZE #23, COMBO CONTACT ARRANGEMENTS, TESTED AT 1300 VAC

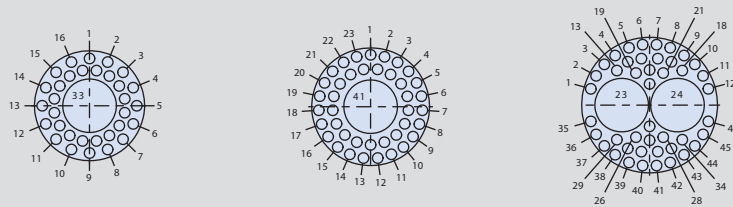

Insert Arrangement	14-208		15-205		19-201	
Contact Size	#8	#23	#8	#23	#8	#23
No. of Contacts	1	32	1	40	2	44

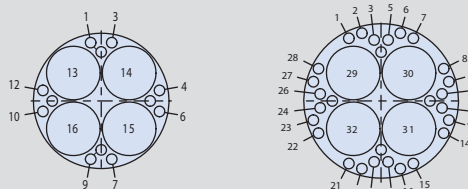

Insert Arrangement	19-202		21-200	
Contact Size	#8	#23	#8	#23
No. of Contacts	4	12	4	28

SERIES 802 AQUAMOUSE