


806-082

Hermetic Bulkhead Feed-Thru

SERIES 806 MULTI-PIN RF CONNECTORS


806-082-02 BOX MOUNT

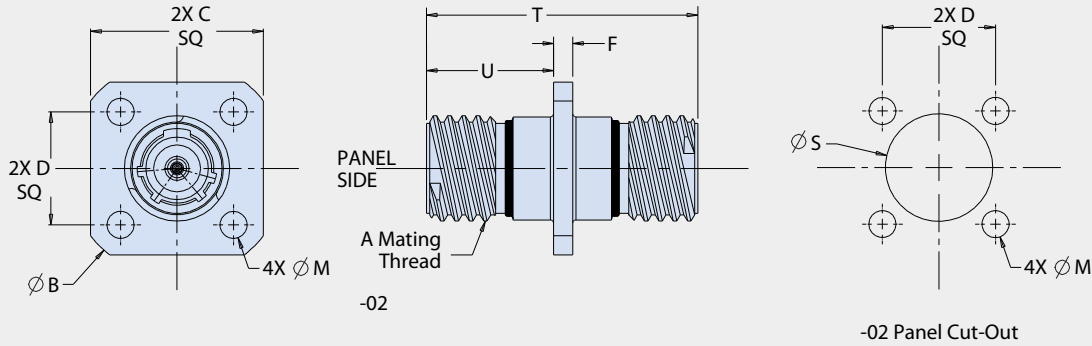

Shell Size	A Thread Mating	Ø B Max Flange	C Square Max Flange Flats	D Square BSC Mounting Holes	F Max Flange	Ø M Thru MTG Holes	Ø S Thru	PANEL THICKNESS		
								T Max	U Max	
7	.4375-.067P-2L-TS-2A	.968 (24.59)	.750 (19.05)	.469 (11.91)	.100 (2.54)	.128 (3.25)	.445 (11.30)	-02	1.400 (35.56)	.875 (22.23)
8	.5000-.067P-2L-TS-2A	1.040 (26.42)	.822 (20.88)	.531 (13.49)			.509 (12.93)			
9	.5625-.067P-2L-TS-2A	1.130 (28.70)	.885 (22.48)	.594 (15.09)			.577 (14.66)	-03	1.650 (41.91)	1.125 (28.58)
10	.6250-.067P-2L-TS-2A	1.174 (29.82)	.913 (23.19)	.625 (15.88)			.645 (16.38)			
11	.6875-.067P-2L-TS-2A	1.240 (31.50)	.960 (24.38)	.670 (17.02)			.712 (18.08)			
12	.7500-.067P-2L-TS-2A	1.354 (34.39)	1.040 (26.42)	.765 (19.43)			.768 (19.51)			
14	.8750-.067P-2L-TS-2A	1.510 (38.35)	1.133 (28.78)	.859 (21.82)			.890 (22.61)			
16	1.0000-.067P-2L-TS-2A	1.620 (41.15)	1.227 (31.17)	.938 (23.83)			1.015 (25.78)			
18	1.1250-.067P-2L-TS-2A	1.784 (45.31)	1.320 (33.53)	1.016 (25.81)	1.125 (28.58)					
20	1.2500-.067P-2L-TS-2A	1.810 (45.97)	1.444 (36.68)	1.109 (28.17)	.125 (3.18)	.154 (3.91)	1.275 (32.39)			
22	1.3750-.067P-2L-TS-2A	2.083 (52.91)	1.570 (39.88)	1.203 (30.56)			1.400 (35.56)			
24	1.5000-.067P-2L-TS-2A	2.200 (55.88)	1.686 (42.82)	1.312 (33.32)			1.525 (38.73)			

806-082
Hermetic Bulkhead Feed-Thru

806-082-07 JAM-NUT MOUNT

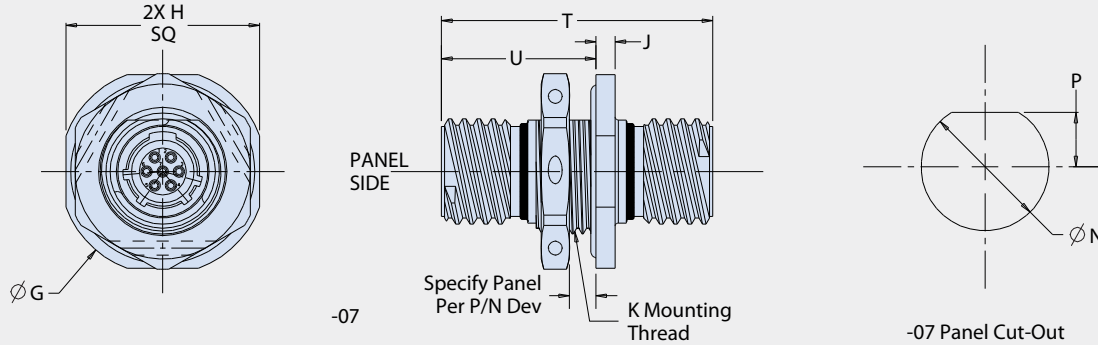


Shell Size	A Thread Mating	Ø G Max Flange	H Square Max Flange Flats	J Max Flange	K Thread Mounting	Ø N +.005/- .000 Mounting Hole	P +.005/- .000 Mounting Flat	PANEL THICKNESS		
								T Max	U Max	
7	.4375-.067P-.2L-TS-2A	.848 (21.54)	.908 (23.06)	.100 (2.54)	M13 X 1-6g .100R	.522 (13.26)	.224 (5.69)	-02	1.400 (35.56)	.875 (22.23)
8	.5000-.067P-.2L-TS-2A	.980 (24.89)	.920 (23.37)		M15 X 1-6g .100R	.601 (15.27)	.256 (6.50)			
9	.5625-.067P-.2L-TS-2A	1.040 (26.42)	.980 (24.89)		M16 X 1-6g .100R	.640 (16.26)	.287 (7.29)	-03	1.650 (41.91)	1.125 (28.58)
10	.6250-.067P-.2L-TS-2A	1.110 (28.19)	1.050 (26.67)		M18 X 1-6g .100R	.719 (18.26)	.318 (8.08)			
11	.6875-.067P-.2L-TS-2A	1.160 (29.46)	1.110 (28.19)		M19 X 1-6g .100R	.759 (19.28)	.350 (8.89)			
12	.7500-.067P-.2L-TS-2A	1.230 (31.24)	1.170 (29.72)		M21 X 1-6g .100R	.837 (21.26)	.381 (9.68)			
14	.8750-.067P-.2L-TS-2A	1.360 (34.54)	1.320 (33.53)		M24 X 1-6g .100R	.955 (24.26)	.443 (11.25)			
16	1.0000-.067P-.2L-TS-2A	1.515 (38.48)	1.444 (36.68)		M27 X 1-6g .100R	1.073 (27.25)	.505 (12.83)			
18	1.1250-.067P-.2L-TS-2A	1.610 (40.89)	1.570 (39.88)		M30 X 1-6g .100R	1.192 (30.28)	.568 (14.43)			
20	1.2500-.067P-.2L-TS-2A	1.850 (46.99)	1.760 (44.70)		M34 X 1-6g .100R	1.349 (34.26)	.630 (16.00)			
22	1.3750-.067P-.2L-TS-2A	2.010 (51.05)	1.913 (48.59)	.128 (3.25)	M37 X 1-6g .100R	1.467 (37.26)	.693 (17.60)			
24	1.5000-.067P-.2L-TS-2A	2.195 (55.75)	2.070 (52.58)		M41 X 1-6g .100R	1.624 (41.25)	.755 (19.18)			

SERIES 806 MULTI-PIN RF CONNECTORS

806-082
 Hermetic Bulkhead Feed-Thru

SERIES 806 MULTI-PIN RF CONNECTORS

806-082-13 WELD-MOUNT

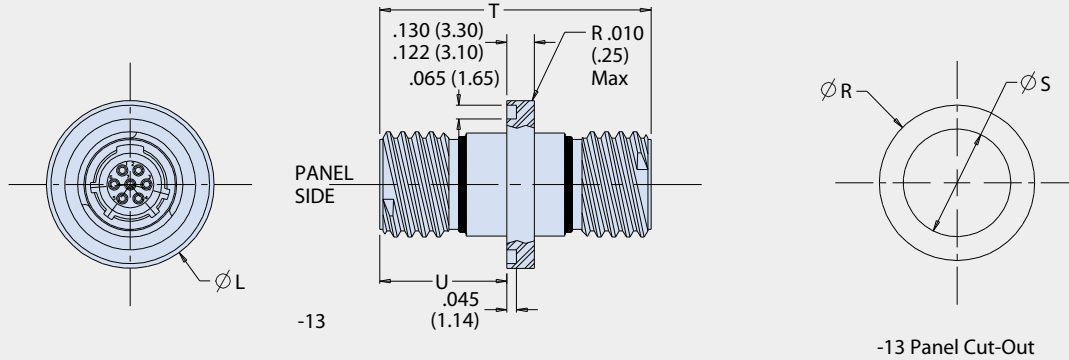

Shell Size	A Thread Mating	Ø L ±.002 Flange	Ø R ±.002 MTG Hole	Ø S Thru	PANEL THICKNESS		
					T Max	U Max	
7	.4375-.067P-.2L-TS-2A	.725 (18.42)	.730 (18.54)	.445 (11.30)	-02	1.400 (35.56)	.875 (22.23)
8	.5000-.067P-.2L-TS-2A	.788 (20.02)	.793 (20.14)	.509 (12.93)		-03	1.650 (41.91)
9	.5625-.067P-.2L-TS-2A	.912 (23.16)	.917 (23.29)	.577 (14.66)			
10	.6250-.067P-.2L-TS-2A	.975 (24.76)	.980 (24.89)	.645 (16.38)			
11	.6875-.067P-.2L-TS-2A	1.038 (26.37)	1.043 (26.49)	.712 (18.08)			
12	.7500-.067P-.2L-TS-2A	1.100 (27.94)	1.105 (28.07)	.768 (19.51)			
14	.8750-.067P-.2L-TS-2A	1.225 (31.12)	1.230 (31.24)	.890 (22.61)			
16	1.0000-.067P-.2L-TS-2A	1.350 (34.29)	1.355 (34.42)	1.015 (25.78)			
18	1.1250-.067P-.2L-TS-2A	1.475 (37.47)	1.480 (37.59)	1.125 (28.58)			
20	1.2500-.067P-.2L-TS-2A	1.600 (40.64)	1.605 (40.77)	1.275 (32.39)			
22	1.3750-.067P-.2L-TS-2A	1.725 (43.82)	1.730 (43.94)	1.400 (35.56)			
24	1.5000-.067P-.2L-TS-2A	1.850 (46.99)	1.855 (47.12)	1.525 (38.73)			