# **Threaded Coupling**



# 881-003R Front Panel Mount Receptacle with Pigtail Wires



Series 881 front panel mount, threaded coupling receptacles are pre-wired, sealed with epoxy and feature integral shield termination platform. Three contact sizes are available with current ratings of 5A, 3A and 1A. Aluminum or stainless steel housings and thermoplastic insulators. High-strength wire with crosslinked ETFE insulation crimped at the factory to high performance contacts. Ultraminiature SuperFly® connectors are ideal for soldier systems and other applications where reduced size and weight are critical.

Shell Size and Insert Arrangements						
No. of Contacts						
Insert Arrangements	#23 5A.	Micro 3A.	Nano 1A.			
B7N	_	_	7			
C10N	_	_	10			
C2M2N	_	2	2			
D3M	_	3	_			
D2W2N	2	_	2			
E3W	3	_	_			
E4M	_	4	_			
E19N	_	_	19			
E4M4N	_	4	4			
F4W	4	_	_			
F7M	_	7	_			
F22N	_	_	22			
F4M8N	_	4	8			
F4W4N	4	_	4			
G7W	7	_	_			
G10M	_	10	_			
G31N	_	_	31			
G6M10N	_	6	10			
G6M12N	_	6	12			
H10W	10	_	_			
H37N	_		37			
H6W14N	6	_	14			
J44N	_		44			
J7W19N	7	_	19			
K19M	_	19	_			
K13M19N	_	13	19			
L22M	_	22	_			

First letter of insert arrangement represents
connector shell size, as in this example K13M19N

#### **NOTES**


- 1. See Section A for insert arrangement layouts
- 2. See Section A for additional finish options

How To Order									
Sample Part Number 881-003R			A	-B7N	-M	004	J	1	-24
Series	881-003	R							
Insert Style	B = Shro	A = Unshrouded Contacts B = Shrouded Contacts are recessed within the insulator							
Shell Size / Insert Arr. <sup>1</sup>	See Shell Size and Insert Arrangement Table								
Material/ Finish <sup>2</sup>	M = Aluminum/electroless nickel RoHS compliant  ZR = Aluminum/zinc-nickel, non-reflective with RoHS compliant black chromate  MT = Aluminum/nickel-PTFE RoHS compliant  ZMT = Stainless steel/nickel-PTFE RoHS compliant								
Wire AWG	See Wire Code Table								
Wire Type	J = "Space Grade" wire M22759/33 or equivalent (ETFE)								
Wire Color	1 = White 5 = Full Color; 1-10 solid color, 11 and up are striped 7 = 10 Color Repeating; Wire #1 black, Wire #11 black, etc								
Wire Length	Overall length in inches measured from front of connector								

### **MOD-686 POLARIZING OPTIONS**

Standard SuperFly® connectors have a single master key. Versions with three keys are also available if alternate key positions are required. Add suffix code 686 to the part number per the following example: 881-003RA-B7N-M004J1-24-686A

Plug Alternate Key Positions							
Suffix Code	Α°	В°					
686A	150°	210°					
686B	75°	210°					
686C	95°	230°					
686D	140°	275°					
686E	75°	275°					
686F	95°	210°					



## **MOD-518 OPEN FACE SEALING**

For IP67 performance in open face (unmated) condition, use suffix -518. Example: 881-003RA-B7N-M004J1-24-**518** 




# **Threaded Coupling**


# 881-003R Front Panel Mount Receptacle with Pigtail Wires


### **ABOUT SHROUDED AND UNSHROUDED SUPERFLY® CONFIGURATIONS**

Shrouded contacts are recessed within the insert. Unshrouded contacts extend from the insert face. Shrouded inserts contain 1 amp and 3 amp Twistpin contacts along with 5 amp socket contacts. Unshrouded inserts contain 1 amp and 3 amp sockets and 5 amp pin.

Wive Code Table									
Wire Code Table									
Layouts with 5A. Contacts									
Insert Arrangement	#23 5A.	Micro 3A.	Nano 1A.	Code					
	#22	_	_	100					
E3W, F4W, G7W, H10W	#24	_	_	200					
G/ W,1110W	#26	_	_	300					
Layouts with 5A.	Layouts with 5A. and 1A. Contacts								
Insert	#23	Micro	Nano	Code					
Arrangement	5A.	3A.	1A.	Code					
	#22	_	#28	104					
	#24	_	#28	204					
	#26	_	#28	304					
D2W2N, F4W4N,	#22	_	#30	105					
H6W14N,	#24	_	#30	205					
J7W19N	#26	_	#30	305					
	#22	_	#32	106					
	#24	_	#32	206					
	#26	_	#32	306					
Layouts with 3A.	Contac	cts							
Insert	#23	Micro	Nano						
Arrangement	5A.	3A.	1A.	Code					
D214 F414 F714		#24		020					
D3M, E4M F7M, G10M, K19M,	_	#26	_	030					
L22M		#28		040					
	_	#30	_	050					
Layouts with 3A.	and 1/	A. Conta	icts						
Insert	#23	Micro	Nano	Code					
Arrangement	5A.	3A.	1A.	couc					
	_	#24	#28	024					
	_	#26	#28	034					
C2M2N,	_	#28	#28	044					
E4M4N, F4M8N	1	#24	#30	025					
G6M10N,	-	#26	#30	035					
G6M12N,	1	#28	#30	045					
K13M19N	-	#24	#32	026					
	1	#26	#32	036					
		#28	#32	046					
Layouts with 1A. Contacts									
Insert Arrangement	#23 5A.	Micro 3A.	Nano 1A.	Code					
B7N, C10N,	_	_	#28	004					
E19N, F22N,	_	_	#30	005					
G31N, H37N,			#32	006					

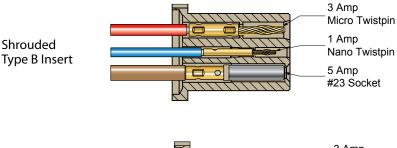



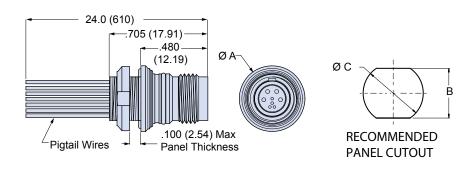

Dimensions								
Shell Size	ØA		В		ØC		A Thread	
SHEII SIZE	ln.	mm.	ln.	mm.	ln.	mm.	A Illieau	
В	.392	9.96	.236	5.99	.282	7.16	M7.0 x .75-6g	
C	.412	10.46	.256	6.50	.302	7.67	M7.5x .75-6g	
D	.432	10.97	.276	7.01	.321	8.15	M8.0 x .75-6g	
Е	.451	11.46	.296	7.52	.341	8.66	M8.5 x .75-6g	
F	.471	11.96	.315	8.00	.361	9.17	M9.0 x .75-6g	
G	.491	12.47	.335	8.51	.380	9.65	M9.5 x .75-6g	
Н	.530	13.46	.374	9.50	.420	10.67	M10.5 x .75-6g	
J	.550	13.97	.414	10.52	.459	11.66	M11.5 x .75-6g	
K	.570	14.48	.433	11.00	.478	12.14	M12.0 x .75-6g	
L	.609	15.47	.473	12.01	.518	13.16	M13.0 x .75-6g	