

GLENAIR SERIES 260 MIL-DTL-26482 Hermetic Series II Type

257-135 Bayonet Coupling Jam-Nut Mount Pin-Pin Feedthrough



HERMETIC LEAK RATE MOD CODES	
Designator	Required Leak Rate
-585A	1 x 10 ⁻¹⁰ cc Helium per second
-585B	1 x 10 ⁻⁹ cc Helium per second
-585C	1 x 10 ⁻⁸ cc Helium per second

NOTES

- To be identified with manufacturer's name, part number and date code, space permitting.
- Material/Finish:
 - Shell and jam-nut: per part number development Titanium and Inconel® available. Consult factory.
 - Contacts hermetic: 52 Nickel alloy/gold plate.
 - Contacts socket: copper alloy, gold plated.
 - Bayonets: stainless steel/passivate.
 - Seals: fluorsilicone
 - Insulator hermetic: full glass.
Insulator socket: high-grade rigid dielectric
- Performance
 - Hermeticity: < 1 x 10⁻⁷ ccHe/sec @ 1 atm differential.
 - Dielectric withstanding voltage: Consult factory or MIL-STD-1669.
 - Insulation resistance: 5000 megohms min @500VDC.
- Consult factory and/or MIL-STD-1669 for arrangement and insert position options.
- Glenair 230-043 will mate with any QPL MIL-DTL-26482 Series II bayonet coupling plug of same size and insert polarization.

HOW TO ORDER			
Sample Part Number	257-135	24	-61
Series / Basic Part No.	257-135 = Jam-Nut Mount Bulkhead Feedthrough		Shell Size Insert Arr.
Shell Size - Layout	Shell Sizes: 8, 10, 12, 14, 16, 18, 20, 22, 24 Layout per MIL-STD-1669; see Shell Size - Insert Layout table		

SHELL SIZE - INSERT LAYOUT															
Shell Size - Layout	Size / Quantity			Shell Size - Layout	Size / Quantity			Shell Size - Layout	Size / Quantity			Shell Size - Layout	Size / Quantity		
	20	16	12		20	16	12		20	16	12		20	16	12
8-2	2			14-9	5		4	18-11		11		22-19			19
8-3	3			14-12	8	4		18-30	29	1		22-21		21	
8-4	4			14-15	14	1		18-32	32			22-32	32		
8-33	3			14-18	18			18-85	5		8	22-34	34		
8-98	3			14-19	19			20-16		16		22-41	27	14	
10-6	6			14-22	1		4	20-24	24			22-55	55		
10-98	6			16-8		8		20-27	27			22-95	26		6
12-3		3		16-14	8		6	20-39	37	2		24-19			19
12-8	8			16-23	22	1		20-41	41			24-27	11		16
12-10	10			16-26	26			20-90	3		12	24-31		31	
14-4			4	16-99	21	2		22-12			12	24-61	61		
14-5		5		18-8			8	22-19			19				

GLENAIR SERIES 260 MIL-DTL-26482 Hermetic Series II Type



257-135 Bayonet Coupling Jam-Nut Mount Pin-Pin Feedthrough

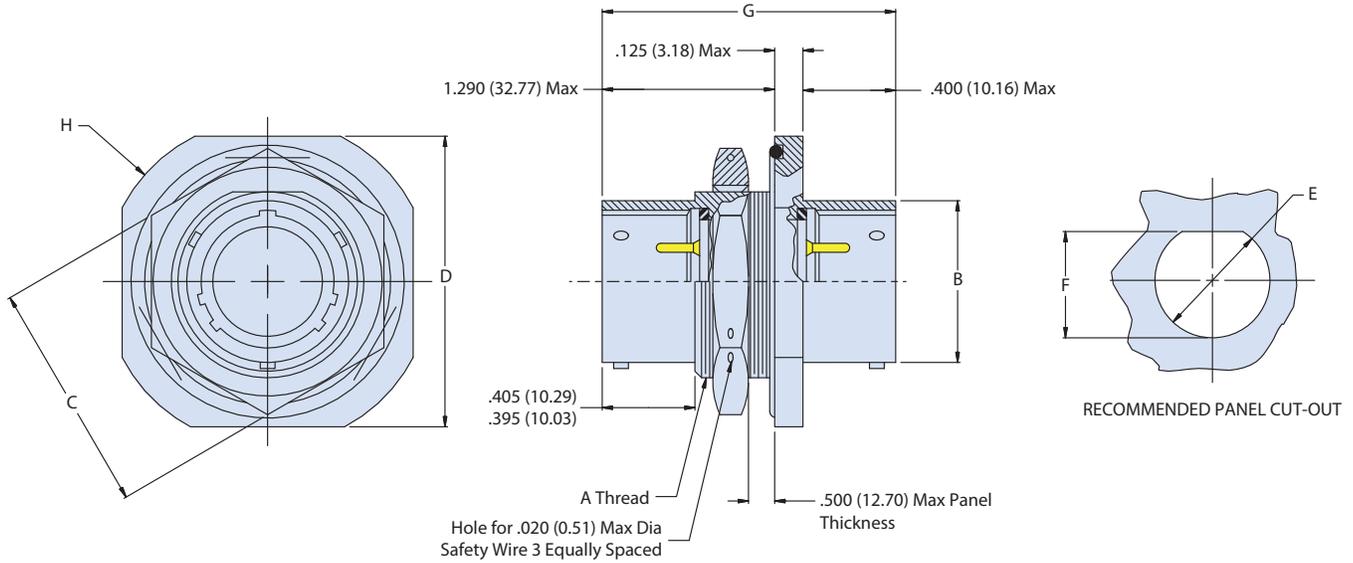


TABLE I: CONNECTOR AND CUT-OUT DIMENSIONS (CONTINUED BELOW)

Shell Size	A Thread Class 2A	B Dia Max	C Hex	D Flats	E Dia +.010 -.005 (+0.3 -0.1)	F Dia +.010 -.005 (+0.3 -0.1)	G Max	H Dia ± .016 (0.4)
8	9/16-24 UNEF	.474 (12.0)	.750 (19.1)	.938 (23.8)	.572 (14.5)	.540 (13.7)	2.125 (54.0)	1.062 (27.0)
10	11/16-24 UNEF	.591 (15.0)	.875 (22.2)	1.062 (27.0)	.697 (17.7)	.665 (16.9)	2.125 (54.0)	1.187 (30.1)
12	7/8-20 UNEF	.751 (19.1)	1.062 (27.0)	1.250 (31.8)	.895 (22.7)	.828 (21.0)	2.125 (54.0)	1.375 (34.9)
14	1-20 UNEF	.876 (22.3)	1.188 (30.2)	1.375 (34.9)	1.010 (25.7)	.952 (24.2)	2.125 (54.0)	1.500 (38.1)
16	1 1/8-18 UNEF	1.001 (25.4)	1.312 (33.3)	1.500 (38.1)	1.135 (28.8)	1.076 (27.3)	2.125 (54.0)	1.625 (41.3)
18	1 1/4-18 UNEF	1.126 (28.6)	1.438 (37.0)	1.625 (41.3)	1.260 (32.0)	1.201 (30.5)	2.125 (54.0)	1.750 (44.5)
20	1 3/8-18 UNEF	1.251 (31.8)	1.562 (39.7)	1.812 (46.0)	1.385 (35.2)	1.326 (33.7)	2.125 (54.0)	1.938 (49.2)
22	1 1/2-18 UNEF	1.376 (35.0)	1.688 (42.9)	1.938 (49.2)	1.510 (38.0)	1.451 (36.9)	2.125 (54.0)	2.062 (52.4)
24	1 5/8-18 UNEF	1.501 (38.1)	1.812 (46.0)	2.062 (52.4)	1.635 (41.5)	1.576 (40.0)	2.125 (54.0)	2.187 (55.5)